


版本 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

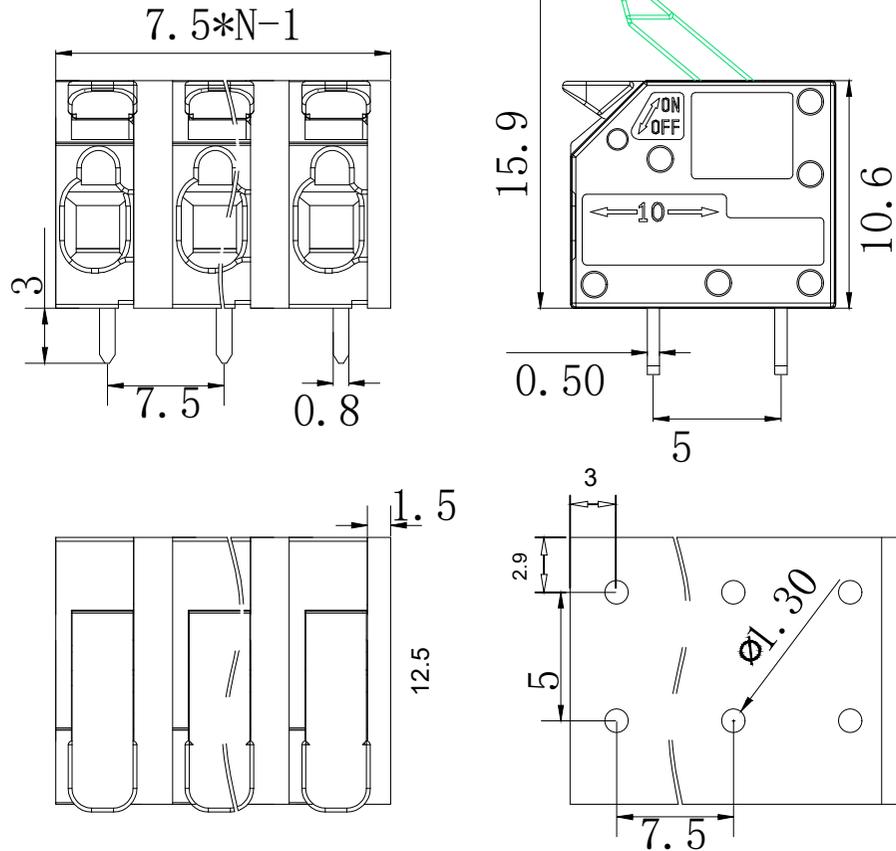

技术参数 (Technical Data)				
应用组别(Use group)	B	C	D	
UL 应用组别(Use group) 额定电器参数 (Rated Electrical Parameters)	300V/15A	300V/15A	450V/24A	
IEC 过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	III/2	
额定电器参数 (Rated Electrical Parameters)	450V/24A	450V/24A	450V/24A	
压线范围(Wire Range)	24-14AWG 0.2-2.5mm <sup>2</sup>			
工频耐压(Frequency Voltage)	AC 2500V			
冲击耐压(Rated Surge Voltage)	4000V			
绝缘阻抗(Insulation Resistance)	DC500V 500MΩ above			
接触电阻(Contact Resistance)	≤20mΩ			
剥线长度(String Length)	8-9 (mm)			
工作温度(Temperature)	-40° C ~ +105° C			
额定扭矩(Rated torque)	/			
材质和电镀(Material and plating)				
绝缘材质(Housing)	PA66 UL94V-0			
导体材料(Contact)	黄铜 镀锡(brass Dumb tin)			
/	/			

产品命名编码:  
(Product Number Code):

FS4-XX-750-806R-YY

系列(Series)

极数(NO. of poles)

端子间距(Pitch)

型号(Model)

塑体颜色(Housing Color)

- |              |                         |
|--------------|-------------------------|
| 1:绿色(Green)  | 7:透明色<br>(Transparent)  |
| 2:蓝色(Blue)   | 8:白色(White)             |
| 3:黑色(Black)  | 9:黄色(Yellow)            |
| 4:灰色(Grey)   | Y:多种颜色<br>(Mixed color) |
| 5:橙色(Orange) |                         |
| 6:红色(Red)    |                         |

P=7.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	14.00	21.50	29.00	36.50	44.00	51.50	59.00	66.50	74.00	81.50	89.00	96.50
B	7.50	15.00	22.50	30.00	37.50	45.00	52.50	60.00	67.50	75.00	82.50	90.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	104.00	111.50	119.00	126.50	134.00	141.50	149.00	156.50	164.00	171.50	179.00	
B	97.50	105.00	112.50	120.00	127.50	135.00	142.50	150.00	157.50	165.00	172.50	



东莞市澳斯电子有限公司  
DONGGUAN AOSI ELECTRONICS CO., LTD.

型号(Type): FS4-XX-750-806R-YY

核准(Approval): 图号(Drawing NO.):

核审(Audit): 单位(Units):mm 页码(Page):1/1

设计(Design): 比例(Scale):FULL

公差范围(Tolerance Range)

150~	±1.50
60~150	±1.00
30~60	±0.60
6~30	±0.40
0~6	±0.25
角度 X (Angle)	X.X ±2°
	X.X ±1°

版次(Versions):T0