
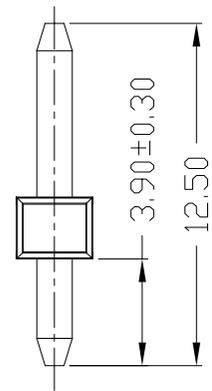
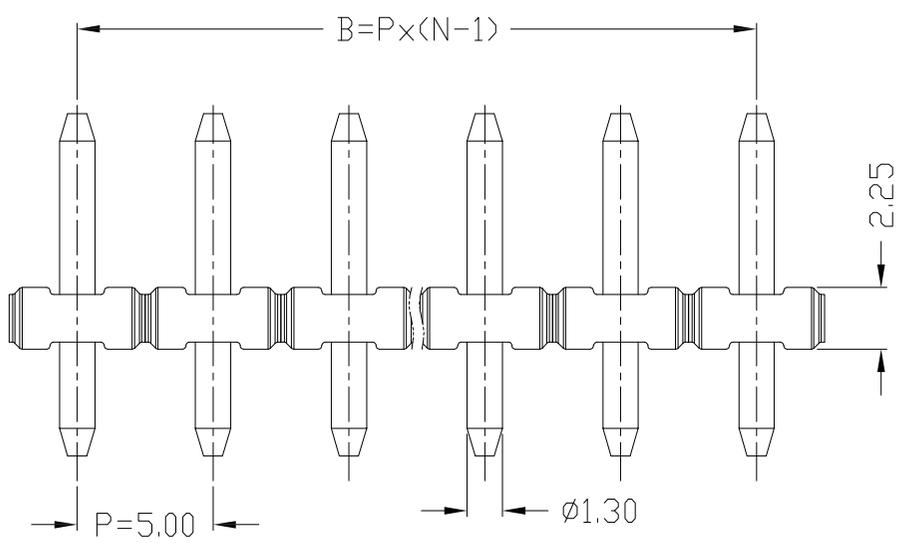
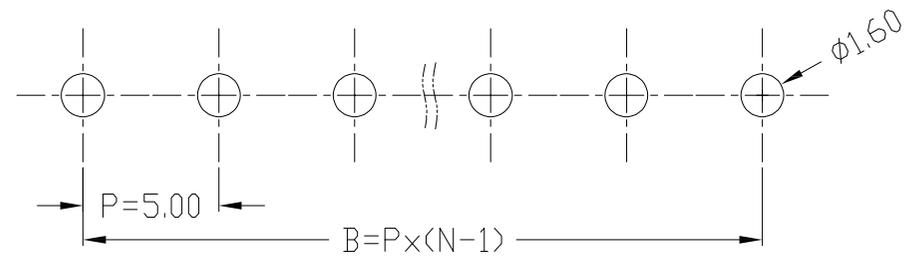



|                 |                        |                        |
|-----------------|------------------------|------------------------|
| 版次<br>(Version) | 变更内容<br>(Rev. Content) | 变更者<br>(Change Person) |
|                 |                        |                        |
|                 |                        |                        |

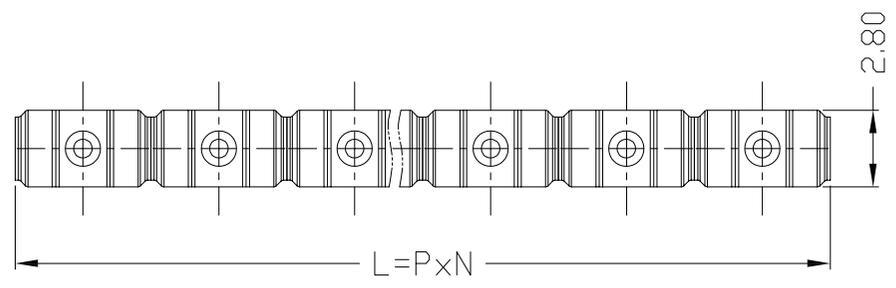

| 技术参数 (Technical Data)        |   |                                  |          |          |
|------------------------------|---|----------------------------------|----------|----------|
| UL                           | 应用组别(Use group)<br>(Rated Electrical Parameters)        | B                                | C        | D        |
|                              | 额定电器参数<br>(Rated Electrical Parameters)                 | 300V/15A                         | 300V/15A | 300V/15A |
| IEC                          | 过压类别 (Overvoltage Category)<br>/污染等级 (Pollution Degree) | III/3                            | III/2    | III/2    |
|                              | 额定电器参数<br>(Rated Electrical Parameters)                 | 250V/12A                         | 250V/12A | 250V/12A |
| 压线范围(Wire Range)             |   | /                                |          |          |
| 工频耐压(Frequency Voltage)      |   | AC 2500V                         |          |          |
| 冲击耐压(Rated Surge Voltage)    |   | 4000V                            |          |          |
| 绝缘阻抗 (Insulation Resistance) |   | DC500V 500MΩ above               |          |          |
| 接触电阻(Contact Resistance)     |   | ≤20mΩ                            |          |          |
| 剥线长度(String Length)          |   | /                                |          |          |
| 工作温度(Temperature)            |   | -40° C~+105° C                   |          |          |
| 额定扭矩(Rated torque)           |   | /                                |          |          |
| 材质和电镀(Material and plating)  |   |                                  |          |          |
| 绝缘材质(Housing)                |   | PBT(UL94 V-0)                    |          |          |
| 导体材料(Contact)                |   | 铜合金, 镀锡(Copper alloy, Sn plated) |          |          |
| /                            |   | /                                |          |          |

产品命名编码:  
(Product Number Code):

FEA1.5-XX-500-01-YY

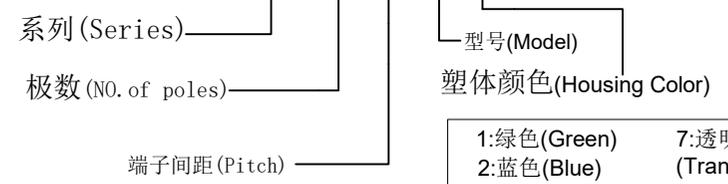

|              |                         |
|--------------|-------------------------|
| 1:绿色(Green)  | 7:透明色<br>(Transparent)  |
| 2:蓝色(Blue)   | 8:白色(White)             |
| 3:黑色(Black)  | 9:黄色(Yellow)            |
| 4:灰色(Grey)   | Y:多种颜色<br>(Mixed color) |
| 5:橙色(Orange) |                         |
| 6:红色(Red)    |                         |

P=5.00mm, N为孔位数(N for hole digits), 有效位数为(Significant Digits): 02p-24p

|   | N | 02P   | 03P   | 04P   | 05P   | 06P   | 07P   | 08P    | 09P    | 10P    | 11P    | 12P    | 13P   |
|---|---|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|-------|
| L |   | 10.00 | 15.00 | 20.00 | 25.00 | 30.00 | 35.00 | 40.00  | 45.00  | 50.00  | 55.00  | 60.00  | 65.00 |
| B |   | 5.00  | 10.00 | 15.00 | 20.00 | 25.00 | 30.00 | 35.00  | 40.00  | 45.00  | 50.00  | 55.00  | 60.00 |
|   | N | 14P   | 15P   | 16P   | 17P   | 18P   | 19P   | 20P    | 21P    | 22P    | 23P    | 24P    |       |
| L |   | 70.00 | 75.00 | 80.00 | 85.00 | 90.00 | 95.00 | 100.00 | 105.00 | 110.00 | 115.00 | 120.00 |       |
| B |   | 65.00 | 70.00 | 75.00 | 80.00 | 85.00 | 90.00 | 95.00  | 100.00 | 105.00 | 110.00 | 115.00 |       |

|  |                       |                 |
|--|-----------------------|-----------------|
| 东莞市澳斯电子有限公司<br>DONGGUAN AOSI ELECTRONICS CO., LTD. | 公差范围(Tolerance Range) |                 |
|  | 150~                  | ±1.50           |
| 型号(Type): FEA1.5-XX-500-01-YY                      | 60~150                | ±1.00           |
|  | 30~60                 | ±0.60           |
| 核准(Approval):                                      | 图号(Drawing NO.):      | 6~30 ±0.40      |
|  |                       | 0~6 ±0.25       |
| 核审(Audit):   | 单位(Units):mm          | 角度(X) ±2°       |
|  | 页码(Page):1/1          | (Angle) X.X ±1° |
| 设计(Design)   | 比例(Scale):FULL        | 版次(Versions):T0 |