
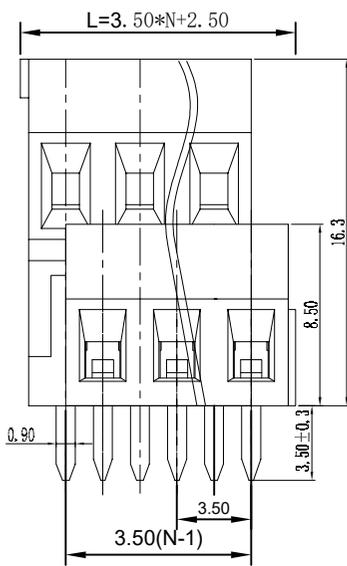
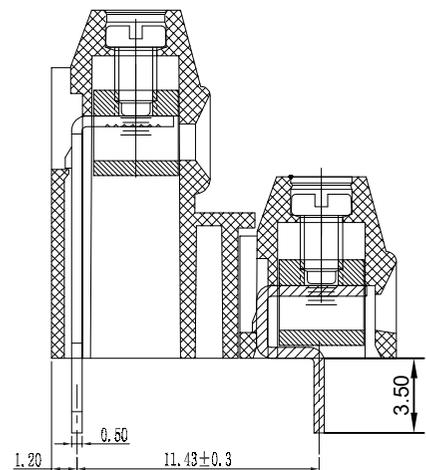
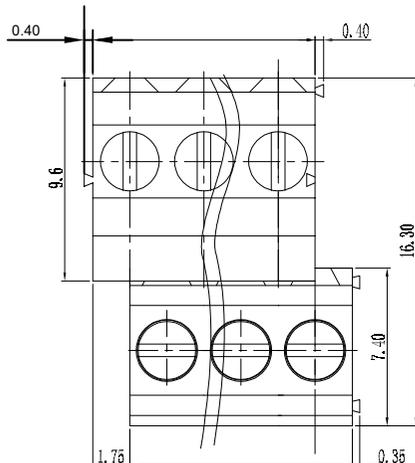



|                 |                        |                        |
|-----------------|------------------------|------------------------|
| 版次<br>(Version) | 变更内容<br>(Rev. Content) | 变更者<br>(Change Person) |
|                 |                        |                        |
|                 |                        |                        |

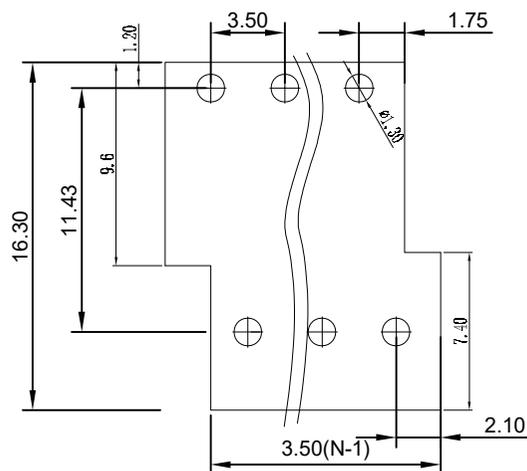

| 技术参数 (Technical Data)        |   |                                   |            |            |
|------------------------------|---|-----------------------------------|------------|------------|
| UL                           | 应用组别(Use group)   | B                                 | C          | D          |
|                              | 额定电器参数<br>(Rated Electrical Parameters)                 | 300V/10A                          | /          | 300V/10A   |
| IEC                          | 过压类别 (Overvoltage Category)<br>/污染等级 (Pollution Degree) | III/3                             | III/2      | III/2      |
|                              | 额定电器参数<br>(Rated Electrical Parameters)                 | 160V/13.5A                        | 200V/13.5A | 400V/13.5A |
| 压线范围(Wire Range)             |   | 28~16AWG 0.5~1.0mm <sup>2</sup>   |            |            |
| 工频耐压(Frequency Voltage)      |   | AC 1600V                          |            |            |
| 冲击耐压(Rated Surge Voltage)    |   | 4000V                             |            |            |
| 绝缘阻抗 (Insulation Resistance) |   | DC500V 500MΩ above                |            |            |
| 接触电阻(Contact Resistance)     |   | ≤20mΩ                             |            |            |
| 剥线长度(String Length)          |   | 4~5 (mm)                          |            |            |
| 工作温度(Temperature)            |   | -40° C~+105° C                    |            |            |
| 额定扭矩(Rated torque)           |   | M2/0. 2N. m                       |            |            |
| 材质和电镀(Material and plating)  |   |                                   |            |            |
| 绝缘材质(Housing)                |   | PA66                              | UL94V-0    |            |
| 导体材料(Contact)                |   | 铜合金, 镀锡(Copper alloy, Sn plisted) |            |            |
| /                            |   | /                                 |            |            |

产品命名编码:  
(Product Number Code):

**FET1-XX-350-22A-YY**

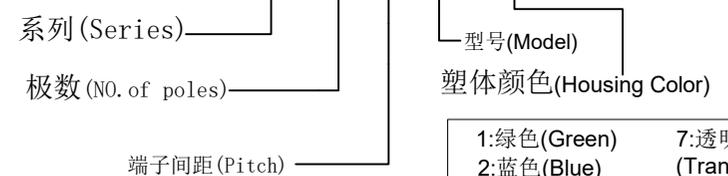

- |              |                         |
|--------------|-------------------------|
| 1:绿色(Green)  | 7:透明色<br>(Transparent)  |
| 2:蓝色(Blue)   | 8:白色(White)             |
| 3:黑色(Black)  | 9:黄色(Yellow)            |
| 4:灰色(Grey)   | Y:多种颜色<br>(Mixed color) |
| 5:橙色(Orange) |                         |
| 6:红色(Red)    |                         |

P=3.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

| N | 02P   | 03P   | 04P   | 05P   | 06P   | 07P   | 08P   | 09P   | 10P   | 11P   | 12P   | 13P   |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L | 9.50  | 13.00 | 16.50 | 20.00 | 23.50 | 27.00 | 30.50 | 34.00 | 37.50 | 41.00 | 44.50 | 48.00 |
| B | 3.50  | 7.00  | 10.50 | 14.00 | 17.50 | 21.00 | 24.50 | 28.00 | 31.50 | 35.00 | 38.50 | 42.00 |
| N | 14P   | 15P   | 16P   | 17P   | 18P   | 19P   | 20P   | 21P   | 22P   | 23P   | 24P   |       |
| L | 51.50 | 55.00 | 58.5  | 62.00 | 65.50 | 69.00 | 72.50 | 76.00 | 79.50 | 83.00 | 86.50 |       |
| B | 45.50 | 49.00 | 52.50 | 56.00 | 59.50 | 63.00 | 66.50 | 70.00 | 73.50 | 77.00 | 80.50 |       |

|  |                       |                 |
|--|-----------------------|-----------------|
| 东莞市澳斯电子有限公司<br>DONGGUAN AOSI ELECTRONICS CO., LTD, | 公差范围(Tolerance Range) |                 |
|  | 150~                  | ±1.50           |
| 型号(Type): FET1-XX-350-22A-YY                       | 60~150                | ±1.00           |
|  | 30~60                 | ±0.60           |
| 核准(Approval):                                      | 6~30                  | ±0.40           |
|  | 图号(Drawing NO.):      | 0~6 ±0.25       |
| 核审(Audit):   | 角度 X                  | ±2°             |
|  | 单位(Units):mm          | (Angle) X.X ±1° |
| 设计(Design)   | 页码(Page):1/1          | 版次(Version):T0  |
|  | 比例(Scale):FULL        |                 |