
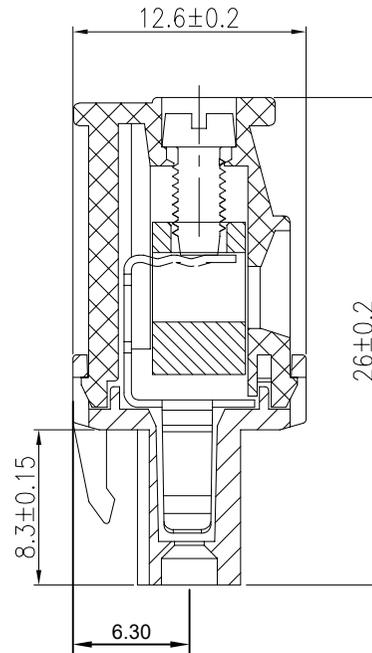


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

技术参数 (Technical Data)

应用组别(Use group)	B	C	D
UL 额定电器参数 (Rated Electrical Parameters)	300V/16A	/	/
IEC 过压类别 (Overvoltage Category) /污染等级 (Pollution Degree)	III/3	III/2	II/2
额定电器参数 (Rated Electrical Parameters)	630V/16A	400V/16A	/
压线范围(Wire Range)	24~12AWG 0.2~4.0mm <sup>2</sup>		
工频耐压(Frequency Voltage)	AC 2000V		
冲击耐压(Rated Surge Voltage)	4000V		
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above		
接触电阻(Contact Resistance)	≤20mΩ		
剥线长度(String Length)	8~9 (mm)		
工作温度(Temperature)	-40° C~+105° C		
额定扭矩(Rated torque)	TQ Lb In. 4.43		
材质和电镀 (Material and plating)			
绝缘材质(Housing)	PA66 UL94V-0		
导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plated)		
/	/		

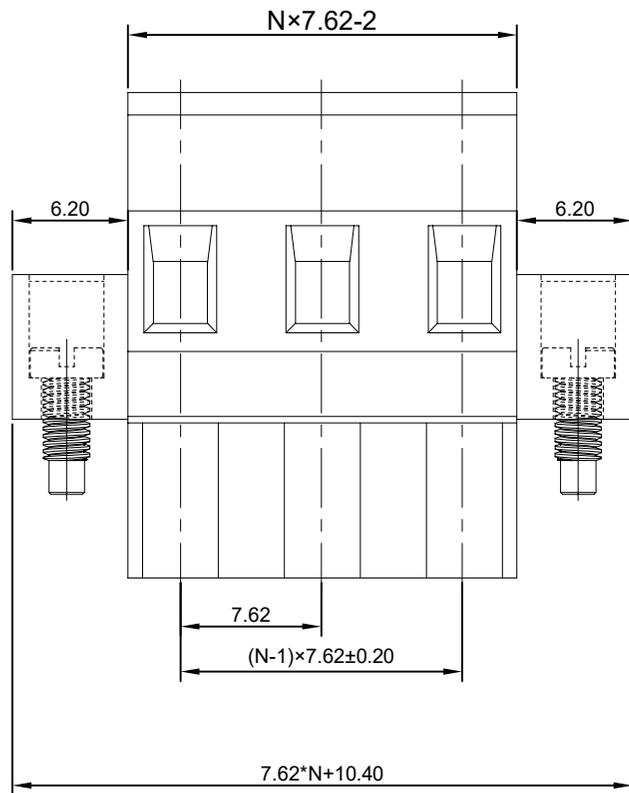

产品命名编码:  
(Product Number Code):

FPC2.5-XX-762-05M-YY

系列 (Series)

极数 (NO. of poles)

端子间距 (Pitch)

型号 (Model)

塑体颜色 (Housing Color)

- |              |                      |
|--------------|----------------------|
| 1:绿色(Green)  | 7:透明色 (Transparent)  |
| 2:蓝色(Blue)   | 8:白色(White)          |
| 3:黑色(Black)  | 9:黄色(Yellow)         |
| 4:灰色(Grey)   | Y:多种颜色 (Mixed color) |
| 5:橙色(Orange) |                      |
| 6:红色(Red)    |                      |

P=7.62mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	25.64	33.26	40.88	48.50	56.12	63.74	71.36	78.98	86.60	94.22	101.84	109.46
B	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	117.08	124.70	132.32	139.94	147.56	155.18	162.80	170.42	178.04	185.66	193.28	
B	99.06	106.68	114.3	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	

 <b>东莞市奥斯电子有限公司</b> <b>DONGGUAN AOSI ELECTRONICS CO., LTD.</b>	公差范围(Tolerance Range)	
	150~	±1.50
型号(Type): FPC2.5-XX-762-05M-YY	60~150	±1.00
	30~60	±0.60
核准(Approval):	6~30	±0.40
	0~6	±0.25
核审(Audit):	角度 (Angle)	X ±2°
	单位(Units):mm	XX ±1°
设计(Design)	比例(Scale):FULL	 版次(Version):T0