


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

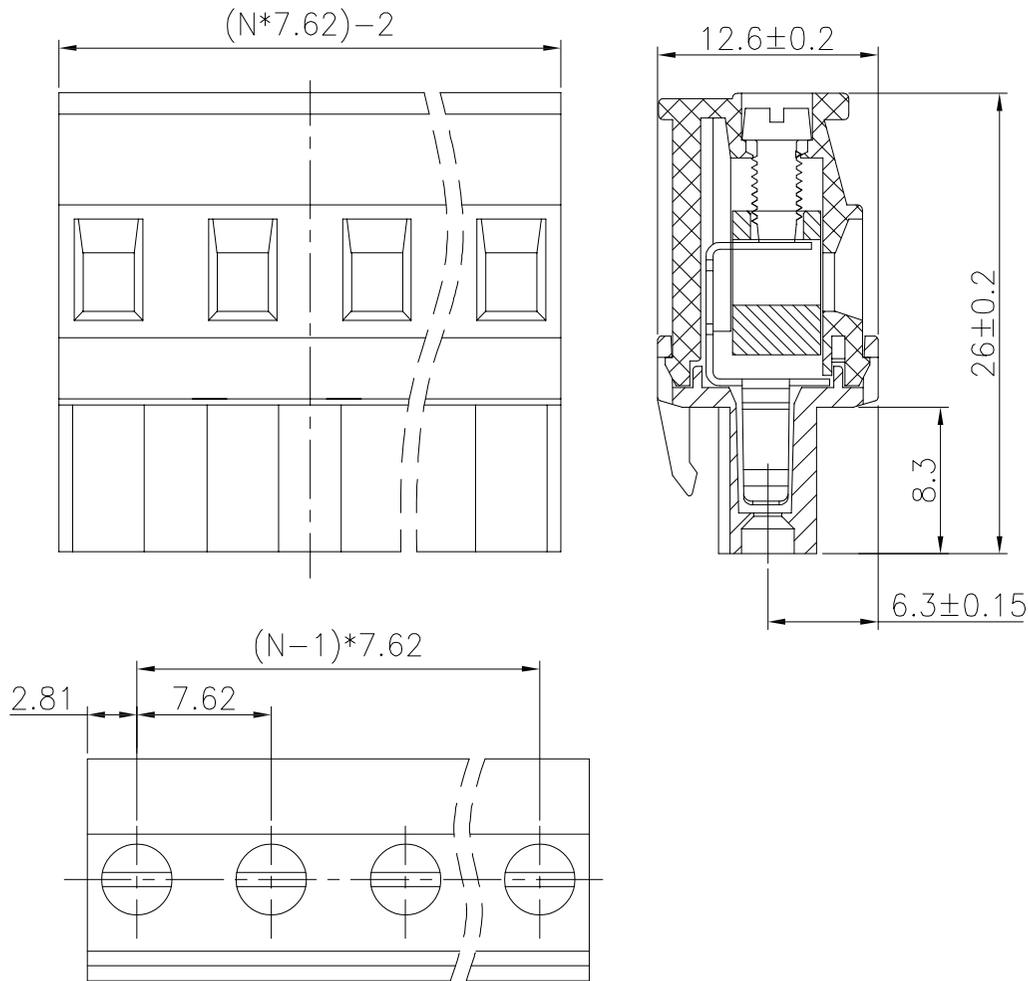

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/16A	/	/
IEC	过压类别(Overvoltage Category)	III/3	III/2	II/2
	污染等级(Pollution Degree)			
	额定电器参数 (Rated Electrical Parameters)	630V/16A	400V/16A	/
	压线范围(Wire Range)	24~14AWG 0.2~2.5mm ²		
	工频耐压(Frequency Voltage)	AC 2500V		
	冲击耐压(Rated Surge Voltage)	4000V		
	绝缘阻抗(Insulation Resistance)	DC500V 500MΩ above		
	接触电阻(Contact Resistance)	≤20mΩ		
	剥线长度(String Length)	7~8 (mm)		
	工作温度(Temperature)	- 40° C~+105° C		
	额定扭矩(Rated torque)	TQ Lb In. 4.43		
材质和电镀(Material and plating)				
	绝缘材质(Housing)	PA66 UL94V-0		
	导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plisted)		
	/	/		

产品命名编码:
(Product Number Code):

FPC2.5-XX-762-05-YY

系列(Series) ————
极数(NO. of poles) ————
端子间距(Pitch) ————
型号(Model) ————
塑体颜色(Housing Color) ————

1:绿色(Green)	7:透明色(Transparent)
2:蓝色(Blue)	8:白色(White)
3:黑色(Black)	9:黄色(Yellow)
4:灰色(Grey)	Y:多种颜色(Mixed color)
5:橙色(Orange)	
6:红色(Red)	

P=7.62mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	13.24	20.86	28.48	36.10	43.72	51.34	58.96	66.58	74.20	81.82	89.44	97.06
B	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	104.68	112.30	119.92	127.54	135.16	142.78	150.40	158.02	165.64	173.26	180.88	
B	99.06	106.68	114.3	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	

 东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.	公差范围(Tolerance Range)	
	150~	±1.50
型号(Type): FPC2.5-XX-762-05-YY	60~150	±1.00
	30~60	±0.60
核准(Approval):	6~30	±0.40
	0~6	±0.25
核审(Audit):	角度(Angle)	X ±2°
	单位(Units):mm	XX ±1°
设计(Design)	比例(Scale):FULL	版次(Version):T0