



版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

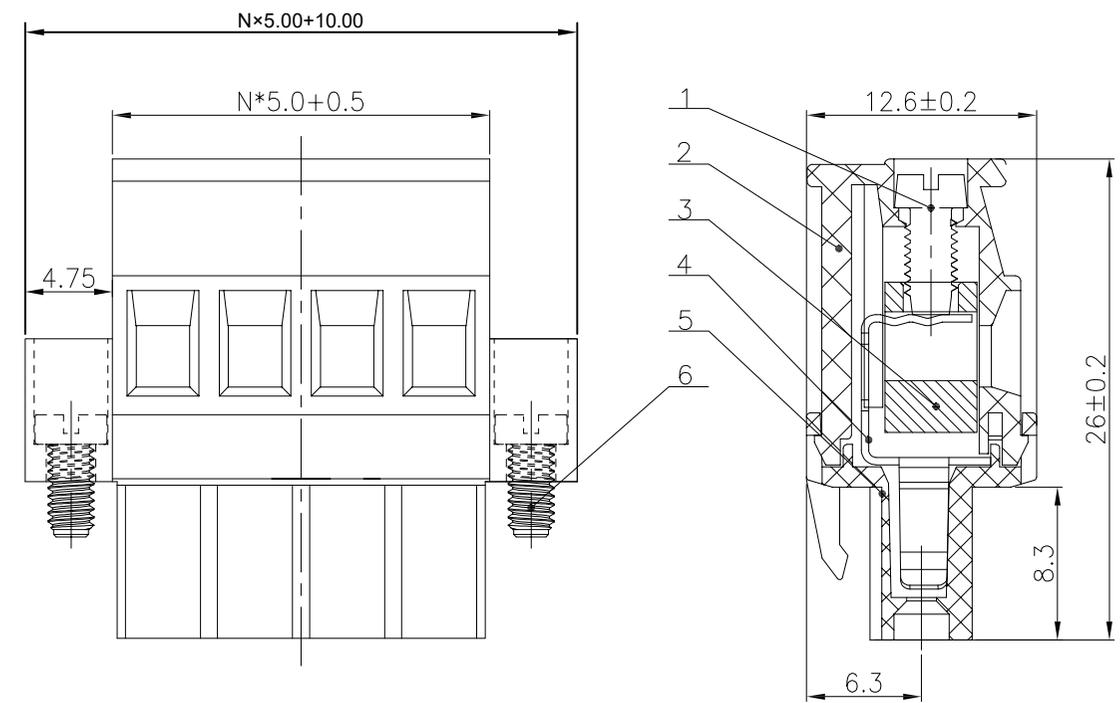

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/16A	/	/
	过压类别 (Overvoltage Category)	III/3	III/2	II/2
IEC	额定电器参数 (Rated Electrical Parameters)	450V/16A	300V/16A	/
	压线范围(Wire Range)	24~12AWG 0.2~4.0mm ²		
	工频耐压(Frequency Voltage)	AC 2000V		
	冲击耐压(Rated Surge Voltage)	4000V		
	绝缘阻抗(Insulation Resistance)	DC500V 500MΩ above		
	接触电阻(Contact Resistance)	≤20mΩ		
	剥线长度(String Length)	8~9 (mm)		
	工作温度(Temperature)	-40° C~+105° C		
	额定扭矩(Rated torque)	TQ Lb In. 4.43		
材质和电镀(Material and plating)				
	绝缘材质(Housing)	PA66(UL94 V-0)		
	导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plsted)		
	/	/		

产品命名编码:
(Product Number Code):

FPC2.5-XX-500-05M-YY

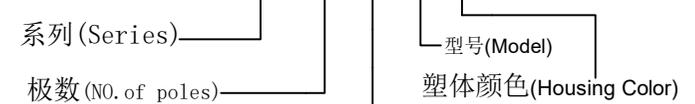

1:绿色(Green)	7:透明色 (Transparent)
2:蓝色(Blue)	8:白色(White)
3:黑色(Black)	9:黄色(Yellow)
4:灰色(Grey)	Y:多种颜色 (Mixed color)
5:橙色(Orange)	
6:红色(Red)	

P=5.00mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00	70.00	75.00
B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	120.00	125.00	130.00	
B	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	

东莞市奥斯电子有限公司
DONGGUAN AOSI ELECTRONICS CO., LTD.

公差范围(Tolerance Range)

150~	±1.50
60~150	±1.00
30~60	±0.60
6~30	±0.40
0~6	±0.25
角度 X	±2°
(Angle) X.X	±1°

型号(Type): FPC2.5-XX-500-05M-YY

图号(Drawing NO.):

图号(Drawing NO.):

单位(Units): mm

页码(Page): 1/1

比例(Scale): FULL

版次(Version): T0