
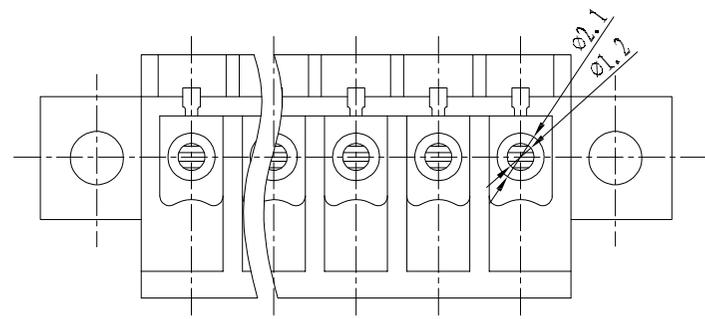
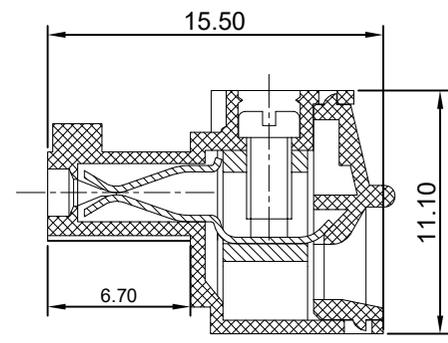


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

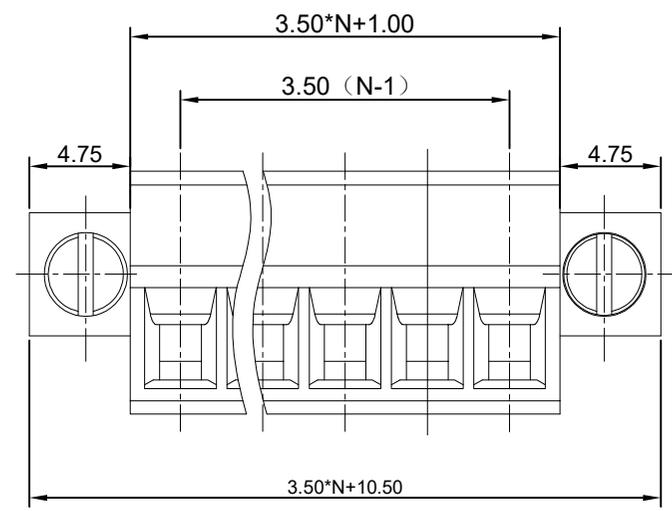

技术参数 (Technical Data)				
应用组别(Use group)	B	C	D	
UL 额定电器参数 (Rated Electrical Parameters)	300V/8A	300V/12A	/	
IEC 过压类别 (Overvoltage Category) /污染等级 (Pollution Degree)	III/3	III/2	II/2	
额定电器参数 (Rated Electrical Parameters)	320V/10A	300V/12A	/	
压线范围(Wire Range)	28~16AWG 0.2~1.5mm <sup>2</sup>			
工频耐压(Frequency Voltage)	AC 2000V			
冲击耐压(Rated Surge Voltage)	4000V			
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above			
接触电阻(Contact Resistance)	≤20mΩ			
剥线长度(String Length)	7~8 (mm)			
工作温度(Temperature)	- 40° C~+105° C			
额定扭矩(Rated torque)	TQ Lb In. 1. 77			
材质和电镀(Material and plating)				
绝缘材质(Housing)	PA66 UL94V-0			
导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plsted)			
/	/			

产品命名编码:  
(Product Number Code):

FPC1.5-XX-350-00M-YY



P=3.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00	45.50	49.00	52.50	56.00
B	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	59.50	63.00	66.50	70.00	73.50	77.00	80.50	84.00	87.50	91.00	94.50	
B	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.	公差范围(Tolerance Range)	
	150~	±1.50
型号(Type): FPC1.5-XX-350-00M-YY	60~150	±1.00
	30~60	±0.60
核准(Approval): 图号(Drawing NO.):	6~30	±0.40
	0~6	±0.25
核审(Audit): 单位(Units):mm 页码(Page):1/1	角度(X)	±2°
	(Angle)X.X	±1°
设计(Design) 比例(Scale):FULL		版次(Version):T0