

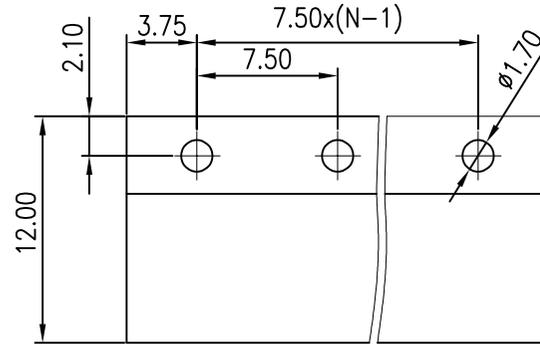
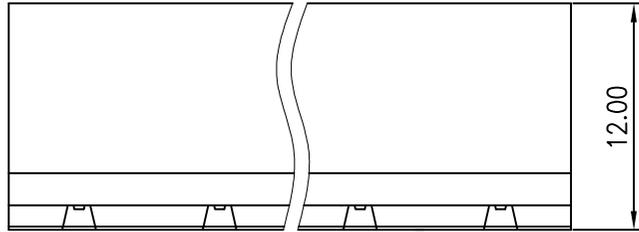


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

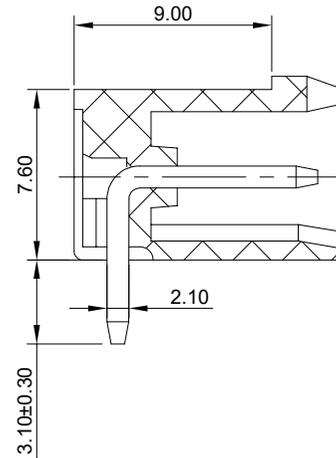

PCB LAYOUT

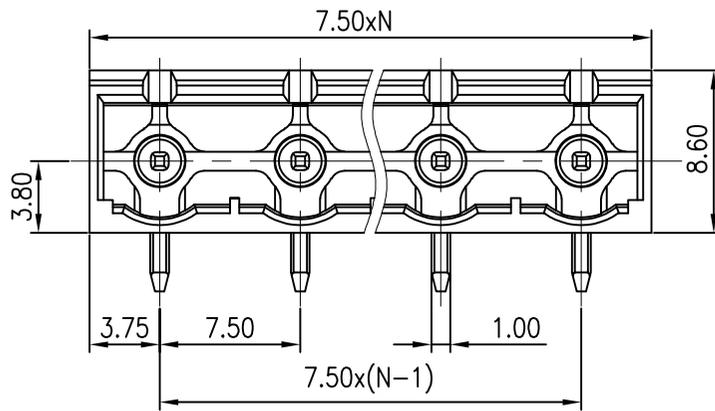

技术参数 (Technical Data)			
应用组别(Use group)	B	C	D
UL 额定电器参数 (Rated Electrical Parameters)	300V/16A	/	300V/10A
过压类别(Overvoltage Category) /污染等级 (Pollution Degree)	III/3	III/2	II/2
IEC 额定电器参数 (Rated Electrical Parameters)	630V/16A	400V/20A	/
压线范围(Wire Range)	/		
工频耐压(Frequency Voltage)	/		
冲击耐压(Rated Surge Voltage)	4000V		
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above		
接触电阻(Contact Resistance)	≤20mΩ		
剥线长度(String Length)	/		
工作温度(Temperature)	-40° C~+105° C		
额定扭矩(Rated torque)	/		
材质和电镀(Material and plating)			
绝缘材质(Housing)	PA66 UL94V-0		
导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plated)		
/	/		

产品命名编码:  
(Product Number Code):

FPM2.5-XX-750-02R-YY

系列 (Series) ———— 型号 (Model)  
极数 (NO. of poles) ———— 塑体颜色 (Housing Color)

端子间距 (Pitch) ————

- |              |                      |
|--------------|----------------------|
| 1:绿色(Green)  | 7:透明色 (Transparent)  |
| 2:蓝色(Blue)   | 8:白色(White)          |
| 3:黑色(Black)  | 9:黄色(Yellow)         |
| 4:灰色(Grey)   | Y:多种颜色 (Mixed color) |
| 5:橙色(Orange) |                      |
| 6:红色(Red)    |                      |

P=7.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	15.00	22.50	30.00	37.50	45.00	52.5	60.00	67.50	75.00	82.50	90.00	97.50
B	7.50	15.00	22.50	30.00	37.50	45.00	52.5	60.00	67.50	75.00	82.50	90.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	105.00	112.50	120.00	127.50	135.00	142.50	150.00	157.50	165.00	172.50	180.00	
B	97.50	105.00	112.50	120.00	127.50	135.00	142.50	150.00	157.50	165.00	172.50	

<b>东莞市澳斯电子有限公司</b> <b>DONGGUAN AOSI ELECTRONICS CO., LTD,</b>	公差范围(Tolerance Range)	
	150~	±1.50
型号(Type): FPM2.5-XX-750-02R-YY	60~150	±1.00
	30~60	±0.60
核准(Approval): 图号(Drawing NO.):	6~30	±0.40
	0~6	±0.25
核审(Audit): 单位(Units):mm 页码(Page):1/1	角度 (Angle) X	±2°
	X.X	±1°
设计(Design) 比例(Scale):FULL		版次(Version):T0