
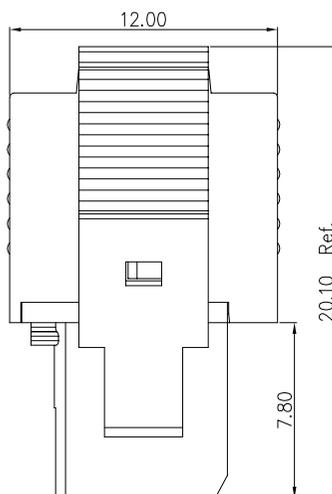
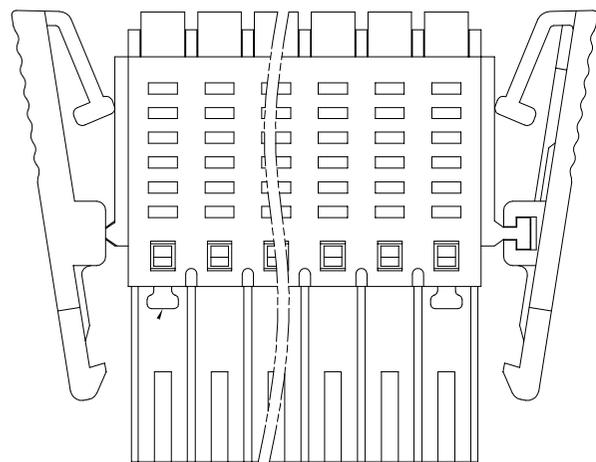
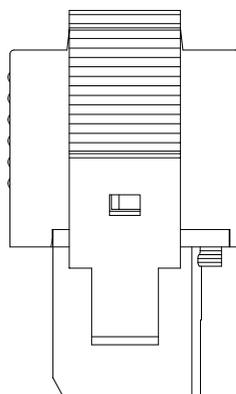



版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

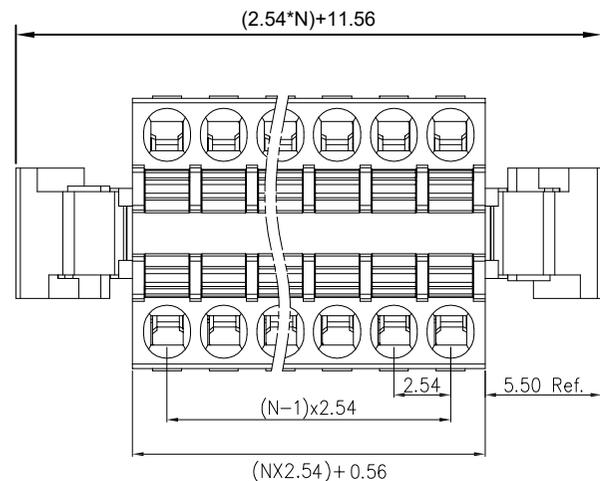

技术参数 (Technical Data)				
应用组别(Use group)	B	C	D	
UL 额定电器参数 (Rated Electrical Parameters)	150V/5A	/	/	
IEC 过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	II/2	
额定电器参数 (Rated Electrical Parameters)	250V/6A	160V/6A	320V/6A	
压线范围(Wire Range)	28~20AWG 0.5mm ²			
工频耐压(Frequency Voltage)	AC 1300V			
冲击耐压(Rated Surge Voltage)	2500V			
绝缘阻抗(Insulation Resistance)	DC500V 500MΩ above			
接触电阻(Contact Resistance)	≤20mΩ			
剥线长度(String Length)	8 (mm)			
工作温度(Temperature)	-40° C~+105° C			
额定扭矩(Rated torque)	/			
材质和电镀(Material and plating)				
绝缘材质(Housing)	PA66 UL94V-0			
导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plsted)			
/	/			

产品命名编码:
(Product Number Gode):

FPS0.5-XX-254-28F-YY

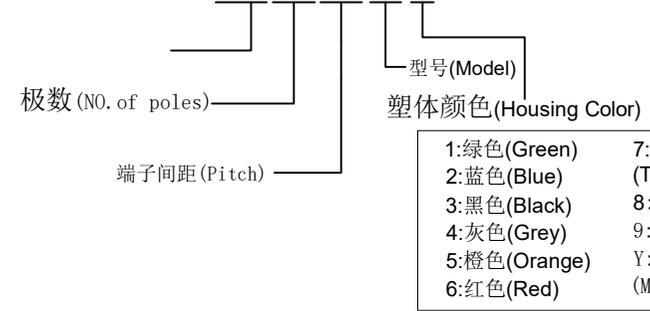

P=2.54mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	16.64	19.18	21.72	24.26	26.80	29.34	31.88	34.42	36.96	39.50	42.04	44.58
B	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	25.40	27.94	30.48
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	47.12	49.66	52.20	54.74	57.28	59.82	62.36	64.90	67.44	69.98	72.52	
B	33.02	35.56	38.10	40.64	43.18	45.72	48.26	50.80	53.34	55.88	58.42	

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.	公差范围(Tolerance Range)	
	150~	±1.50
型号(Type): FPS0.5-XX-254-28F-YY	60~150	±1.00
	30~60	±0.60
核准(Approval):	6~30	±0.40
	0~6	±0.25
核审(Audit):	角度(Angle)	X ±2°
	单位(Units):mm	页码(Page):1/1
设计(Design)	比例(Scale):FULL	X.X ±1°
		版次(Version):T0