


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

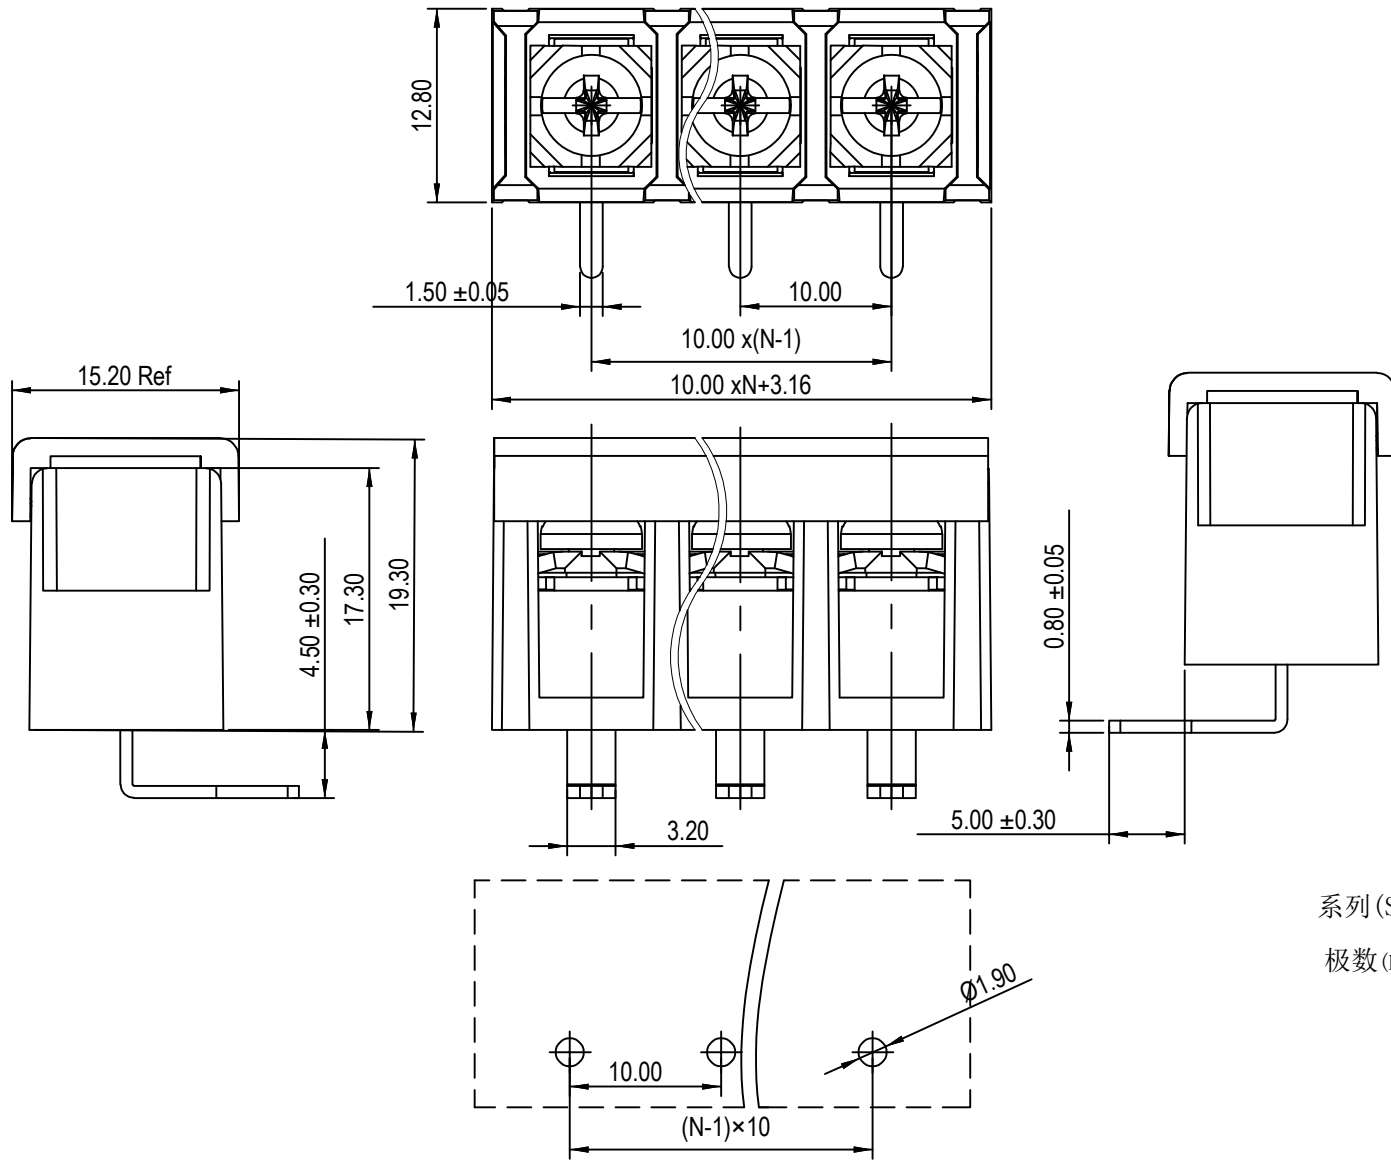

技术参数 (Technical Data)				
UL	应用组别 (Use group)	B	C	D
UL	额定电器参数 (Rated Electrical Parameters)	300V/20A	150V/20A	300V/10A
	过压类别 (Overvoltage Category) / 污染等级 (Pollution Degree)	III/3	III/2	II/2
IEC	额定电器参数 (Rated Electrical Parameters)	600V/32A	600V/32A	600V/32A
压线范围 (Wire Range)		22~12AWG		
工频耐压 (Frequency Voltage)		/		
冲击耐压 (Rated Surge Voltage)		/		
绝缘阻抗 (Insulation Resistance)		/		
接触电阻 (Contact Resistance)		/		
剥线长度 (String Length)		/		
工作温度 (Temperature)		-40° C ~ +105° C		
额定扭矩 (Rated torque)		M4/1.2		
材质和电镀 (Material and plating)				
绝缘材质 (Housing)		PA66		
导体材料 (Contact)		铜合金, 镀锡 (Copper alloy, Sn plated)		
/		/		

产品命名编码:
(Product Number Code):


BT4-XX-1000-58R-YY

系列 (Series) ————
极数 (NO. of poles) ————
端子间距 (Pitch) ————
型号 (Model) ————
塑体颜色 (Housing Color) ————

- | | |
|---------------|----------------------|
| 1:绿色 (Green) | 7:透明色 (Transparent) |
| 2:蓝色 (Blue) | 8:白色 (White) |
| 3:黑色 (Black) | 9:黄色 (Yellow) |
| 4:灰色 (Grey) | Y:多种颜色 (Mixed color) |
| 5:橙色 (Orange) | |
| 6:红色 (Red) | |

P=10.00mm, N为孔位数 (N for hole digits), 有效位数为 (Significant Digits): 02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	23.16	33.16	43.16	53.16	63.16	73.16	83.16	93.16	103.16	113.16	123.16	133.16
B	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	143.16	153.16	163.16	173.16	183.16	193.16	203.16	213.16	223.16	233.16	243.16	
B	130.00	140.00	150.00	160.00	170.00	180.00	190.00	200.00	210.00	220.00	230.00	

 东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.	公差范围 (Tolerance Range)	
	150~	±1.50
型号 (Type): BT4-XX-1000-58R-YY	60~150	±1.00
	30~60	±0.60
核准 (Approval):	图号 (Drawing NO.):	6~30 ±0.40
		0~6 ±0.25
核审 (Audit):	单位 (Units): mm	页码 (Page): 1/1
		角度 (Angle) X ±2° X.X ±1°
设计 (Design)	比例 (Scale): FULL	版次 (Version): T0