
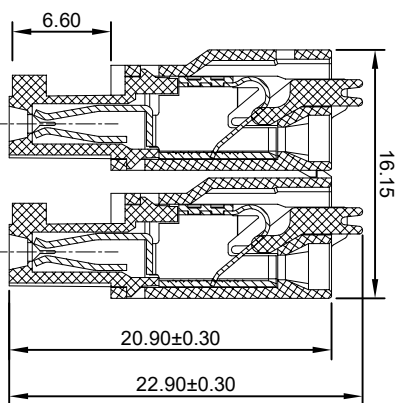
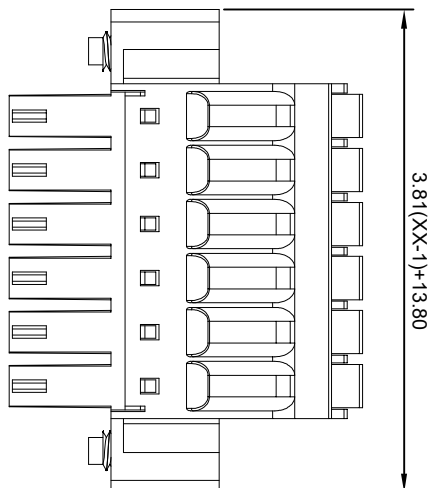


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

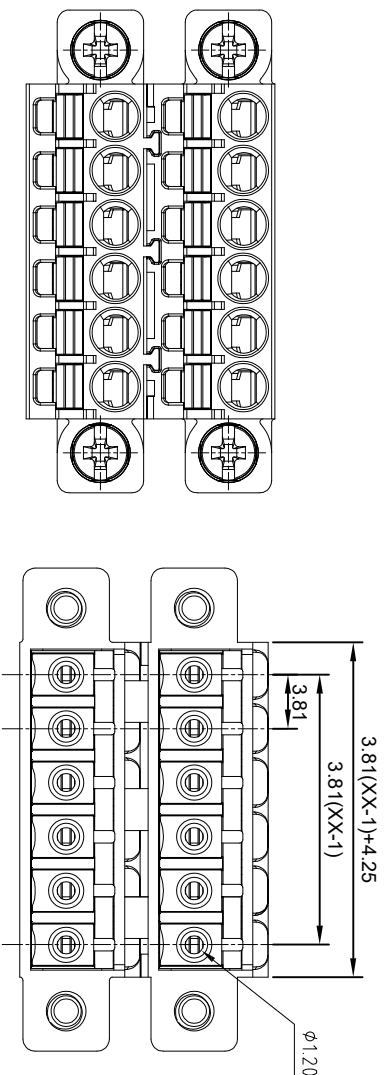


技术参数 (Technical Data)

应用组别(Use group)	B	C	D
UL 额定电器参数 (Rated Electrical Parameters)	300V/8A	/	300V/8A
过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	II/2
IEC 额定电器参数 (Rated Electrical Parameters)	160V/8A	160V/8A	320V/8A
压线范围(Wire Range)	24~16AWG 0.2~1.5mm ²		
工频耐压(Frequency Voltage)	AC 1600V		
冲击耐压(Rated Surge Voltage)	2500V		
绝缘阻抗(Insulation Resistance)	DC500V 500MΩ above		
接触电阻(Contact Resistance)	≤20mΩ		
剥线长度(Stripping Length)	9~10 (mm)		
工作温度(Temperature)	-40° C~+105° C		
额定扭矩(Rated torque)	/		
材料和电镀(Material and plating)			
绝缘材质(Housing)	PA66		
导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plated)		

产品命名编码: (Product Number Code):

FPS1.5-XX-381-22M-YY

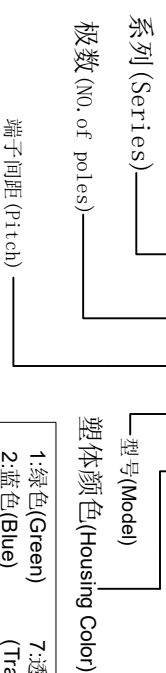

- 塑料颜色 (Housing Color)
- 1:绿色(Green)
 - 2:蓝色(Blue)
 - 3:黑色(Black)
 - 4:灰色(Grey)
 - 5:橙色(Orange)
 - 6:红色(Red)
 - 7:透明色 (Transparent)
 - 8:白色(White)
 - 9:黄色(Yellow)
 - Y:多种颜色 (Mixed color)

P=3.81mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

	N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	17.61	21.42	25.23	29.04	32.85	36.66	40.47	44.28	48.09	51.90	55.71	59.52	
B	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.10	41.91	45.72	
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P		
L	63.33	67.14	70.95	74.76	78.57	82.38	86.19	90.00	93.81	97.62	101.43		
B	49.53	53.34	57.15	60.96	64.77	68.58	72.39	76.20	80.01	83.82	87.63		


 东莞市澳斯电子有限公司
DONGGUAN AOSI ELECTRONICS CO., LTD.

型号 (Type): FPS1.5-XX-381-22M-YY

核准 (Approval): 图号 (Drawing NO.):

核审 (Audit): 单位 (Units): mm 页码 (Page): 1/1

设计 (Design) 比例 (Scale): FULL



版次 (Version): T10

公差范围 (Tolerance Range)

150~	±1.50
60~150	±1.00
30~60	±0.60
6~30	±0.40
0~6	±0.25
角度 X	±2°
角度 Y	±1°