
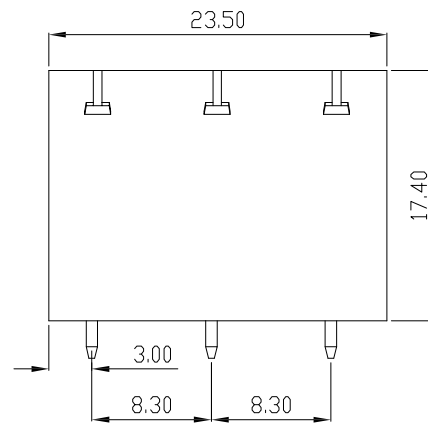
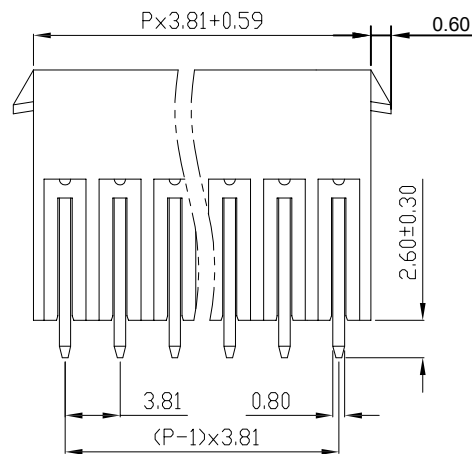



版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

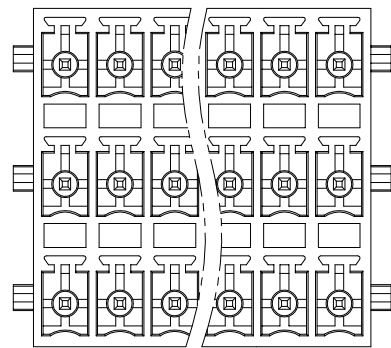

### 技术参数 (Technical Data)

UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/8A	/	300V/10A
	过压类别 (Overvoltage Category) / 污染等级 (Pollution Degree)	III/3	III/2	II/2
IEC	额定电器参数 (Rated Electrical Parameters)	/	250V/7A	320V/7A
压线范围(Wire Range)		/		
工频耐压(Frequency Voltage)		AC 1600V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗 (Insulation Resistance)		/		
接触电阻(Contact Resistance)		/		
剥线长度(String Length)		/		
工作温度(Temperature)		-40° C ~ +105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plated)		
/		/		

产品命名编码:  
(Product Number Code):

**FPH1.5-XX-381-33-YY**

系列 (Series)

极数 (NO. of poles)

端子间距 (Pitch)


型号 (Model)

塑体颜色 (Housing Color)

- |                |                       |
|----------------|-----------------------|
| 1: 绿色 (Green)  | 7: 透明色 (Transparent)  |
| 2: 蓝色 (Blue)   | 8: 白色 (White)         |
| 3: 黑色 (Black)  | 9: 黄色 (Yellow)        |
| 4: 灰色 (Grey)   | Y: 多种颜色 (Mixed color) |
| 5: 橙色 (Orange) |                       |
| 6: 红色 (Red)    |                       |

P=3.81mm, N为孔位数(N for hole digits), 有效位数为 (Significant Digits): 02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	9.41	13.22	17.03	20.84	24.65	28.46	32.27	36.08	39.89	43.70	47.51	51.32
B	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29	38.10	41.91	45.72
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	55.13	58.94	62.75	66.56	70.37	74.18	77.99	81.80	85.61	89.42	93.23	
B	49.53	53.34	57.15	60.96	64.77	68.58	72.39	76.20	80.01	83.82	87.63	

 <b>东莞市奥斯电子有限公司</b> DONGGUAN AOSI ELECTRONICS CO., LTD.	公差范围 (Tolerance Range)	
	150~	±1.50
型号 (Type): FPH1.5-XX-381-33-YY	60~150	±1.00
	30~60	±0.60
核准 (Approval):	6~30	±0.40
	0~6	±0.25
核审 (Audit):	角度 (Angle)	X ±2°
	单位 (Units): mm	X.X ±1°
设计 (Design)	比例 (Scale): FULL	版次 (Version): T0