
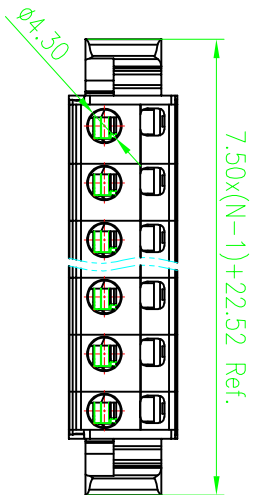
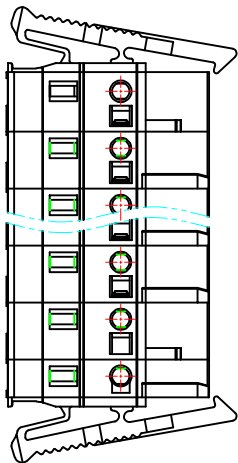



版本 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

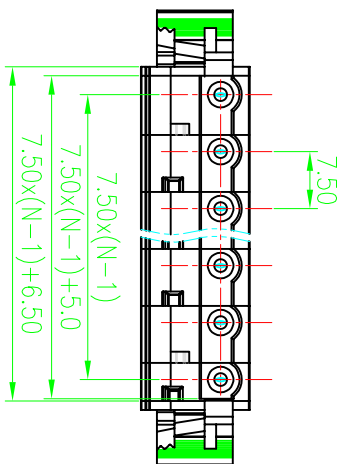

P=7.50mm, N为孔位数(N for hole digits), 有效位数为(Significant Digits): 02p-24p


N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	30.02	37.52	45.02	52.52	60.02	67.52	75.02	82.52	90.02	97.52	105.02	112.52
B	7.50	15.00	22.50	30.00	37.50	45.00	52.50	60.00	67.50	75.00	82.50	90.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	120.02	127.52	135.02	142.52	150.02	157.52	165.02	172.52	180.02	187.52	195.02	
B	97.50	105.00	112.50	120.00	127.50	135.00	142.50	150.00	157.50	165.00	172.50	

技术参数 (Technical Data)

应用组别(Use group)	B	C	D
	UL 额定电器参数 (Rated Electrical Parameters) 300V/15A/300V/15A / 耐压类别 (Overvoltage Category) / 污染等级 (Pollution Degree)		
IEC 额定电器参数 (Rated Electrical Parameters)	III/3	III/2	II/2
压线范围 (Wire Range)	22~14AWG		
工频耐压 (Frequency Voltage)	/		
冲击耐压 (Rated Surge Voltage)	6000V		
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above		
接触电阻 (Contact Resistance)	≤20mΩ		
剥线长度 (String Length)	9-10CM		
工作温度 (Temperature)	-40 ° C ~ +105 ° C		
额定扭矩 (Rated torque)	/		
材质和电镀 (Material and plating)			
绝缘材质 (Housing)	PA66		
导体材料 (Contact)	铜合金, 镀锡 (Copper alloy, Sn plated)		
	/		

产品命名编码:
(Product Number Code):

FPC2.5-XX-750-22F-YY

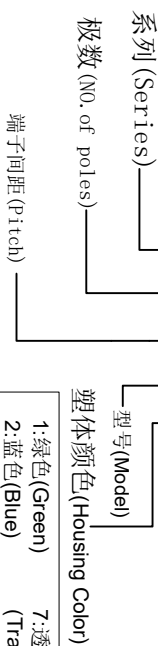

- | | |
|----------------|-----------------------|
| 1: 绿色 (Green) | 7: 透明色 (Transparent) |
| 2: 蓝色 (Blue) | 8: 白色 (White) |
| 3: 黑色 (Black) | 9: 黄色 (Yellow) |
| 4: 灰色 (Grey) | Y: 多种颜色 (Mixed color) |
| 5: 橙色 (Orange) | |
| 6: 红色 (Red) | |



东莞市澳斯电子有限公司
DONGGUAN AOSI ELECTRONICS CO., LTD.

型号 (Type): FPC2.5-XX-750-22F-YY

核准 (Approval): 图号 (Drawing NO.):

核审 (Audit): 单位 (Units): mm 页码 (Page): 1/1

设计 (Design) 比例 (Scale): FULL

公差范围 (Tolerance Range)

150~	±1.50
60~150	±1.00
30~60	±0.60
6~30	±0.40
0~6	±0.25
角度 X	±2°
XX	±1°

版次 (Version): T0