

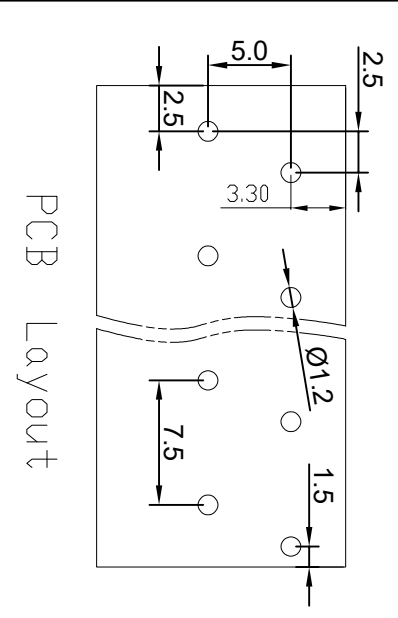

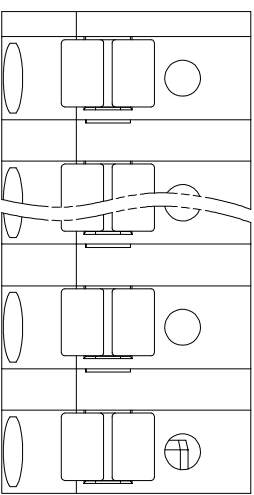


linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to			
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

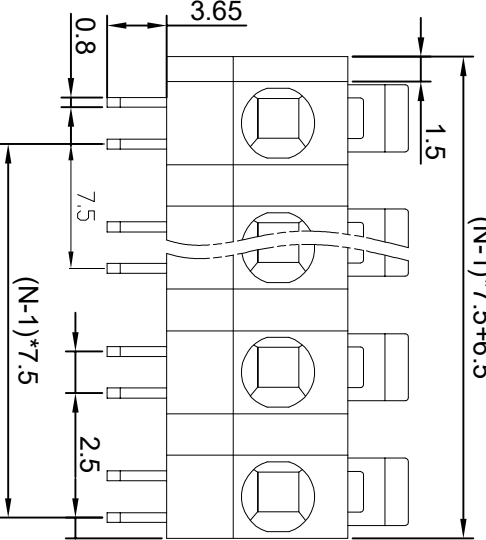

PCB Layout

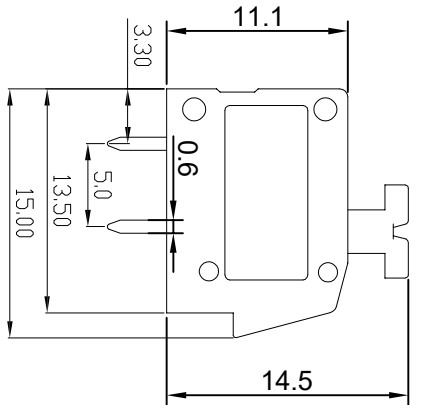

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		KEN	21.10.28

UL/CUL 技术参数



UL/CUL Technical Data	等级	Use Group	B	C	D
额定电压 Rated Voltage	M	300	-	300	
额定电流 Rated Current	A	16	-	16	
接线范围 Wire Range	单/多芯线 Solid/Stranded	AWG	12-20		
耐电压 Withstanding Voltage			1600V/1Min		

IEC 技术参数



IEC Technical Data	过电压类别 Overvoltage Category	污染等级 Contamination Class	额定电压 Rated Voltage	额定电流 Rated Current	额定冲击电压 Impulse withstand voltage
	III	3	250	24	4
	III	2	450	24	4
	II	2	630	24	4

材料 Material	绝缘材料 Insulation Material	阻燃等级 Inflammability	导体材料 Conductor Material	导体表面镀层 Conductive Coating
	PA66	UL94V-0	铜合金 Copper alloy	镀锡 Tin Plated
一般参数 Other Data	间距 Pitch	极数 Poles	剥线长度 Stripping Length	螺丝 Screw 扭矩 Torque(Max)
	7.5	02-XX	11	-
	工作温度 Operating temperatur	引脚尺寸 Pin Dimensions	PCB板孔径 PCB Hole Diameter	
	-40~+105	0.6~0.8	1.2	

DES.	DES.	DES.	DES.	DES.	DES.	DES.	DES.	DES.	DES.	DES.	DES.	DES.
CHK.	APP.	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE	DATE
CHK.	APP.	21.10.28	21.10.28	21.10.28	21.10.28	21.10.28	21.10.28	21.10.28	21.10.28	21.10.28	21.10.28	21.10.28
单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 1:1											第三视角 THIRD ANGLE PROJECTION	
名称 / TITLE											版本 / REV A	
FS2.5-XX-750-06												

**东莞市澳斯电子有限公司**  
 DONGGUAN AOSI ELECTRONICS CO.,LTD