

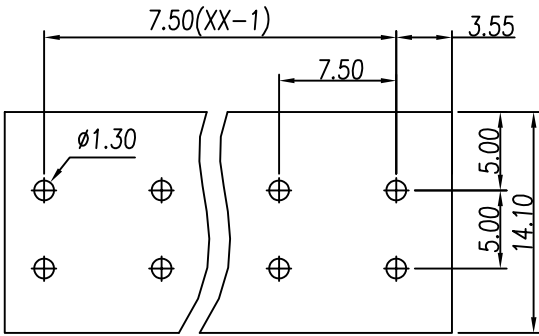


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

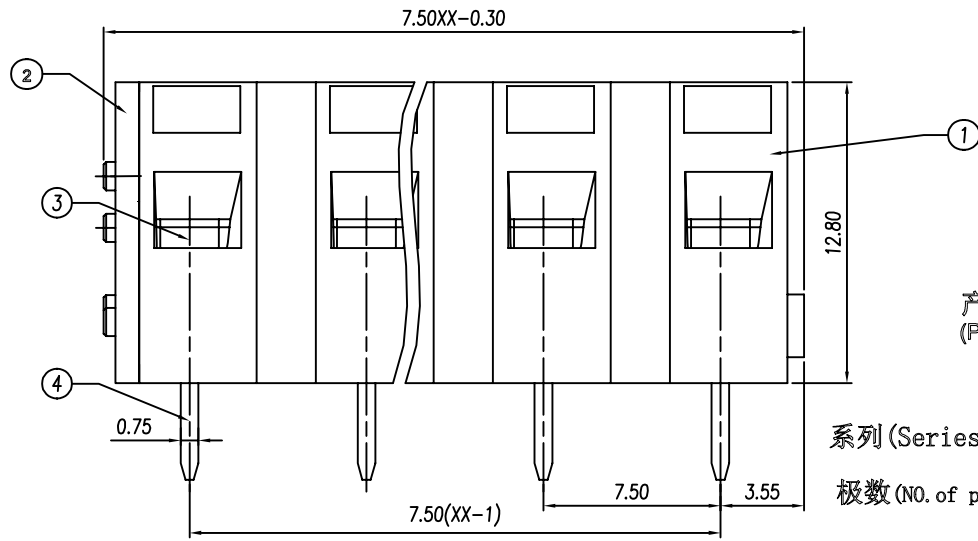

P.C.B. LAYOUT

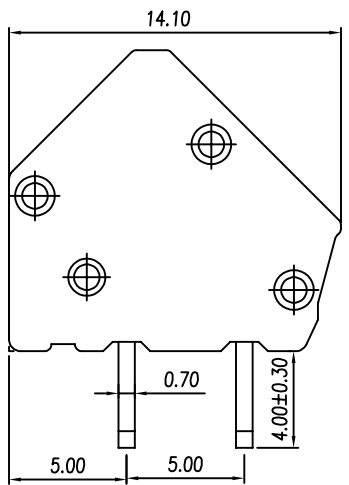

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/15A	300V/15A	450V/24A
IEC	过压类别 (Overvoltage Category) /污染等级 (Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	360V/24A	450V/24A	1000V/24A
压线范围(Wire Range)		28-12AWG 0.2-2.5mm ²		
工频耐压(Frequency Voltage)		AC 2500V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		5~6 (mm)		
工作温度(Temperature)		-40° C~+105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66 UL94V-0		
导体材料(Contact)		黄铜, 镀锡(brass, Dumb tin)		
/		/		

产品命名编码:
(Product Number Code):

FS2.5-XX-750-04-YY


系列(Series) ———— 型号(Model)
极数(NO. of poles) ———— 塑体颜色(Housing Color)

端子间距(Pitch) ————

- 1:绿色(Green)
- 2:蓝色(Blue)
- 3:黑色(Black)
- 4:灰色(Grey)
- 5:橙色(Orange)
- 6:红色(Red)
- 7:透明色 (Transparent)
- 8:白色(White)
- 9:黄色(Yellow)
- Y:多种颜色 (Mixed color)

P=7.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	14.70	22.20	29.70	37.20	44.70	52.20	59.70	67.20	74.70	82.20	89.70	97.20
B	7.50	15.00	22.50	30.00	37.50	45.00	52.50	60.00	67.50	75.00	82.50	90.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	104.70	112.20	119.70	127.20	134.70	142.20	149.70	157.20	164.70	172.20	179.70	
B	97.50	105.00	112.50	120.00	127.50	135.00	142.50	150.00	157.50	165.00	172.50	



东莞市澳斯电子有限公司
DONGGUAN AOSI ELECTRONICS CO., LTD.

公差范围(Tolerance Range)

150~	±1.5'
60~150	±1.0'
30~60	±0.6'
6~30	±0.4'
0~6	±0.2'
角度 X	±2'
(Angle) X.X	±1'

型号(Type): FS2.5-XX-750-04-YY

核准(Approval): 图号(Drawing NO.):

核审(Audit): 单位(Units):mm 页码(Page):1/1

设计(Design): 比例(Scale):FULL

版次(Version): 1