






版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

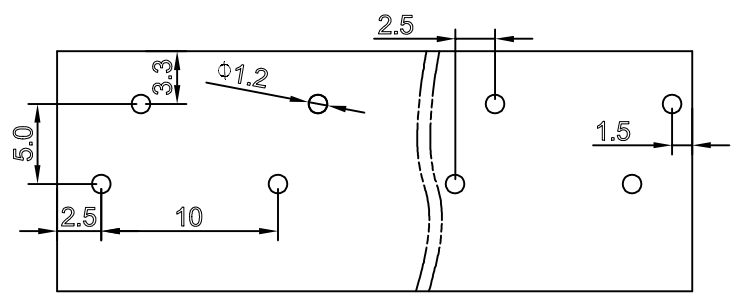

P.C.B. LAYOUT

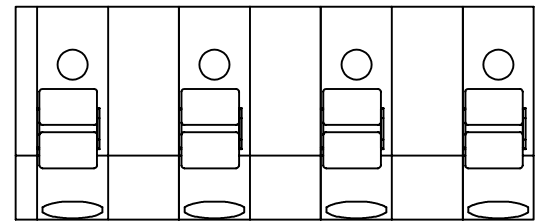

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/12A	/	300V/10A
IEC	过压类别 (Overvoltage Category) /污染等级 (Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	320V/16A	320V/12A	630V/16A
压线范围(Wire Range)		24-12AWG 0.34-4.0mm ²		
工频耐压(Frequency Voltage)		AC 1600V		
冲击耐压(Rated Surge Voltage)		2500V		
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		11 (mm)		
工作温度(Temperature)		-40° C~+105° C		
额定扭矩(Rated torque)		/		
材质和电镀 (Material and plating)				
绝缘材质(Housing)		PA66 UL94V-0		
导体材料(Contact)		红铜, 镀锡(Red brass, Dumb tin)		
/		/		

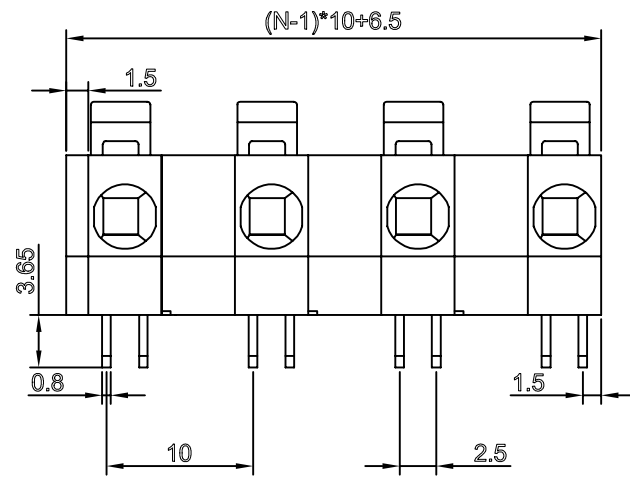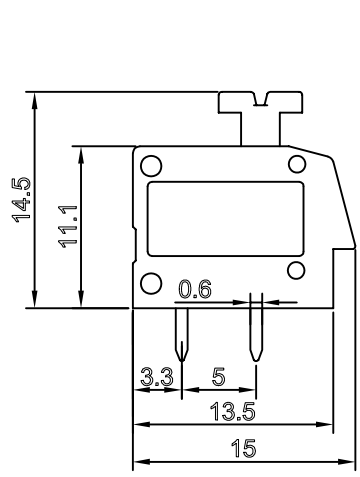

产品命名编码:
(Product Number Code):

FS2.5-XX-1000-06-YY

系列 (Series) ————
极数 (NO. of poles) ————
端子间距 (Pitch) ————
型号 (Model) ————
塑体颜色 (Housing Color) ————

- 1:绿色(Green)
- 2:蓝色(Blue)
- 3:黑色(Black)
- 4:灰色(Grey)
- 5:橙色(Orange)
- 6:红色(Red)
- 7:透明色 (Transparent)
- 8:白色 (White)
- 9:黄色 (Yellow)
- Y:多种颜色 (Mixed color)

P=10.00mm,N为孔位数(N for hole digits),有效位数为 (Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	16.50	26.50	36.50	46.50	56.50	66.50	76.50	86.50	96.50	106.50	116.50	126.50
B	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	136.50	146.50	156.50	166.50	176.50	186.50	196.50	206.50	216.50	226.50	236.50	
B	130.00	140.00	150.00	160.00	170.00	180.00	190.00	200.00	210.00	220.00	230.00	

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.	公差范围(Tolerance Range)	
	150~	±1.5'
型号(Type): FS2.5-XX-1000-06-YY	60~150	±1.0'
	30~60	±0.6'
核准(Approval): _____ 图号(Drawing NO.): _____	6~30	±0.4'
	0~6	±0.2'
核审(Audit): _____ 单位(Units):mm 页码(Page):1/1	角度 X	±2'
	(Angle) X.X	±1'
设计(Design) _____ 比例(Scale):FULL		版次(Version):1