
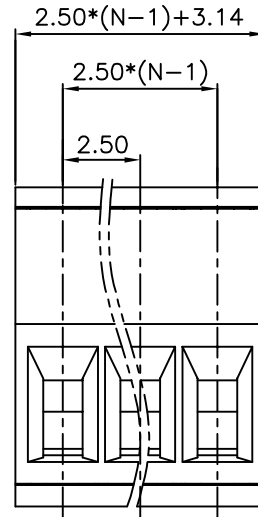
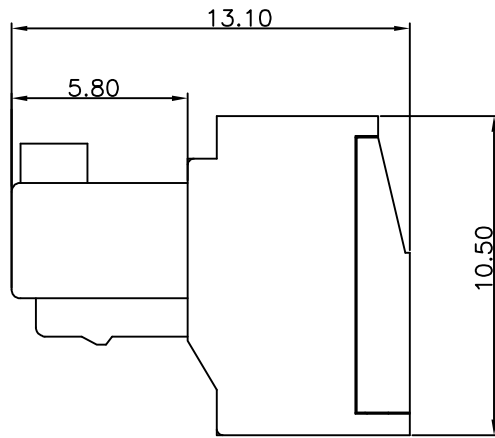


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

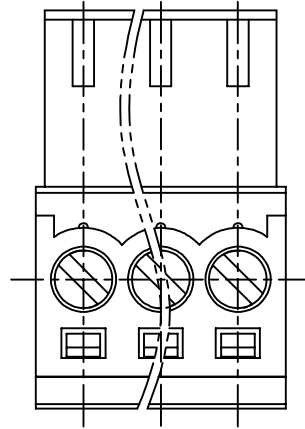

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	150V/5A	/	/
IEC	过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	100V/5A	160V/5A	320V/5A
压线范围(Wire Range)		26~20AWG (0.2~0.5mm²)		
工频耐压(Frequency Voltage)		AC 1300V		
冲击耐压(Rated Surge Voltage)		2500V		
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		5-6 (mm)		
工作温度(Temperature)		-40℃~+105℃		
额定扭矩(Rated torque)		M1.6/0.1N.m		
焊锡温度(Soldering temperature)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66 UL94V-0		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plsted)		

产品命名编码:
(Product Number Gode):

FPC1-XX-250-00-YY		
系列(Series)		型号(Model)
极数(NO.of poles)		塑体颜色(Housing Color)
端子间距(Pitch)		
1:绿色(Green) 7:透明(Transparent) 2:蓝色(Blue) 8:白色(White) 3:黑色(Black) 9:黄色(Yellow) 4:灰色(Grey) Y:多种颜色(Mixed color) 5:橙色(Orange) 6:红色(Red)		

P=2.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p												
N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	5.64	8.14	10.64	13.14	15.64	18.14	20.64	23.14	25.64	28.14	30.64	33.14
B	2.50	5.00	7.50	10.00	12.50	15.00	17.50	20.00	22.50	25.00	27.50	30.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	35.64	38.14	40.64	43.14	45.64	48.14	50.64	53.14	55.64	58.14	60.64	
B	32.50	35.00	37.50	40.00	42.50	45.00	47.50	50.00	52.50	55.00	57.50	

 东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD,		公差范围(Tolerance Range)	
型号(Type): FPC1-XX-250-00-YY		150~	±1.50
		60~150	±1.00
核准(Approval):		图号(Drawing NO.):	30~60 ±0.60
			6~30 ±0.40
核审(Audit):		单位(Units):mm	0~6 ±0.25
		页码(Page):1/1	角度(X) ±2° (Angle) X.X ±1°
设计(Design):		比例(Scale):FULL	版次(Versio):T0