

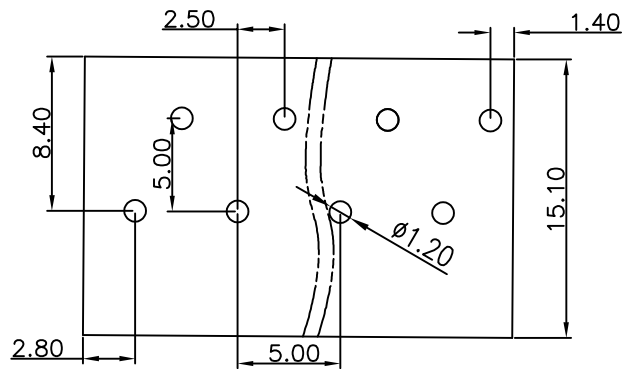
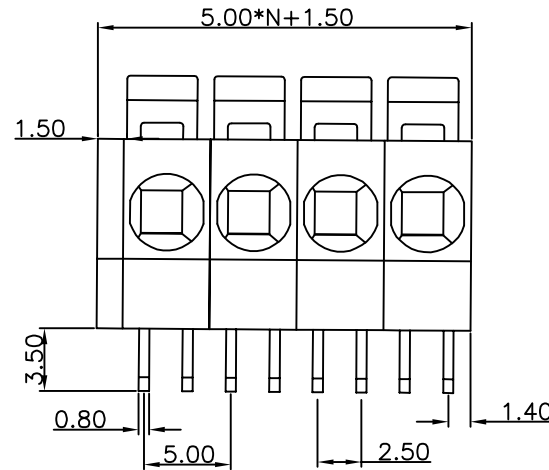


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

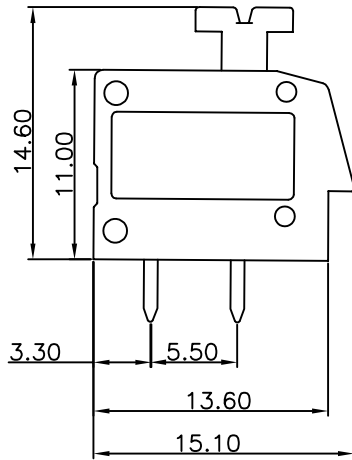

P.C.B. LAYOUT

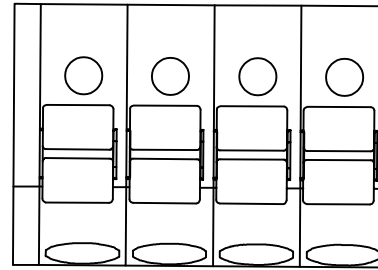

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/16A	300V/16A	300V/16A
IEC	过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	300V/16A	450V/24A	630V/24A
压线范围(Wire Range)		20~12AWG (0.2-4.0mm²)		
工频耐压(Frequency Voltage)		AC 1600V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		9-10 (mm)		
工作温度(Temperature)		-40℃~+105℃		
额定扭矩(Rated torque)		/		
焊锡温度(Soldering temperature)		250°/5S		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66 UL94V-0		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plsted)		

产品命名编码:
(Product Number Code):

FS2.5-XX-500-06-YY

系列(Series)

型号(Model)

极数(NO.of poles)


塑体颜色(Housing Color)

端子间距(Pitch)

- | | |
|--------------|---------------------|
| 1:绿色(Green) | 7:透明(Transparent) |
| 2:蓝色(Blue) | 8:白色(White) |
| 3:黑色(Black) | 9:黄色(Yellow) |
| 4:灰色(Grey) | Y:多种颜色(Mixed color) |
| 5:橙色(Orange) | |
| 6:红色(Red) | |

P=5.00mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	11.50	16.50	21.50	26.50	31.50	36.50	41.50	46.50	51.50	56.50	61.50	66.50
B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	71.50	76.50	81.50	86.50	91.50	96.50	101.50	106.50	111.50	116.50	121.50	
B	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.00	105.00	110.00	115.00	

 东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD ,			公差范围(Tolerance Range)		
			150~	±1.50	
型号(Type): FS2.5-XX-500-06-YY			60~150	±1.00	
			30~60	±0.60	
核准(Approval):	图号(Drawing NO.):		6~30	±0.40	
			0~6	±0.25	
核审(Audit):	单位(Units):mm	页码(Page):1/1	角度	X	±2°
			(Angle)	X.X	±1°
设计(Design):	比例(Scale):FULL				版次(Version):T0