
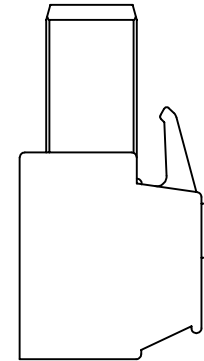
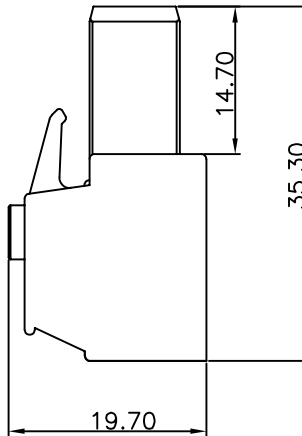
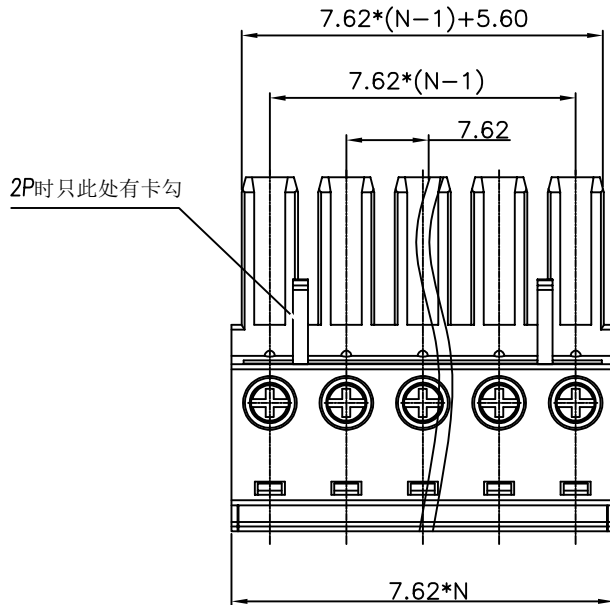
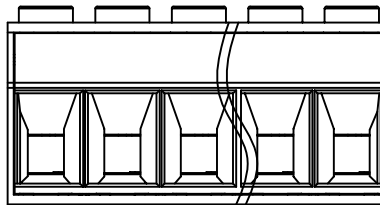


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

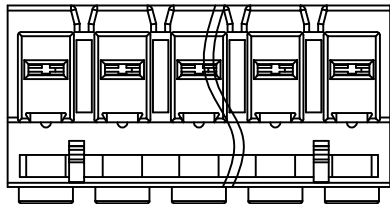

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	600V/41A	/	600V/5A
IEC	过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	1000V/41A	1000V/41A	1000V/41A
压线范围(Wire Range)		24~8AWG (0.2-6.0mm²)		
工频耐压(Frequency Voltage)		AC 1600V		
冲击耐压(Rated Surge Voltage)		8000V		
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		10 (mm)		
工作温度(Temperature)		-40℃~+105℃		
额定扭矩(Rated torque)		M3/0.5N.m		
焊锡温度(Soldering temperature)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66 UL94V-0		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plsted)		

产品命名编码:
(Product Number Code):

FPC4-XX-762-01-YY		
系列(Series)	型号(Model)	塑体颜色(Housing Color)
极数(NO.of poles)		
端子间距(Pitch)		
1:绿色(Green) 7:透明(Transparent) 2:蓝色(Blue) 8:白色(White) 3:黑色(Black) 9:黄色(Yellow) 4:灰色(Grey) Y:多种颜色(Mixed color) 5:橙色(Orange) 6:红色(Red)		

P=7.62mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p												
N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44	99.06
B	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	106.68	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	182.88	
B	99.06	106.68	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD			公差范围(Tolerance Range)	
型号(Type): FPC4-XX-762-01-YY			150~	±1.50
核准(Approval):			60~150	±1.00
图号(Drawing NO.):			30~60	±0.60
核审(Audit):			6~30	±0.40
单位(Units):mm			0~6	±0.25
页码(Page):1/1			角度(X) (Angle) X.X	±2° ±1°
设计(Design):			比例(Scale):FULL	版次(Versio):T0