

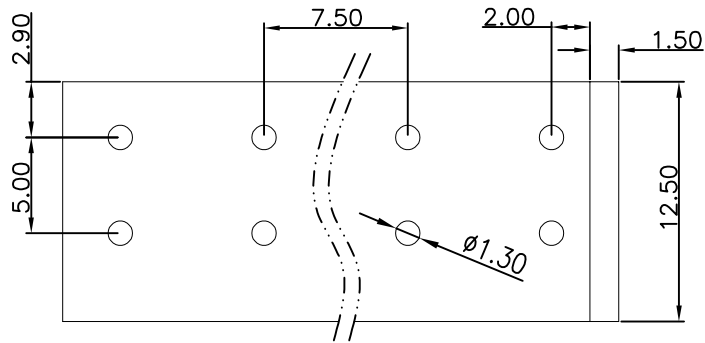
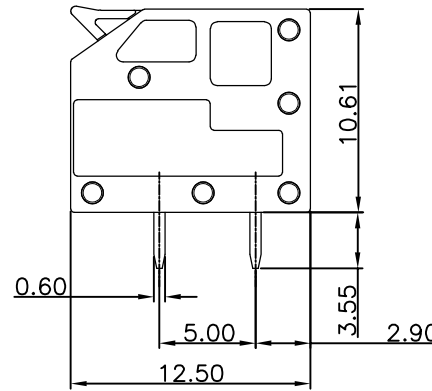


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

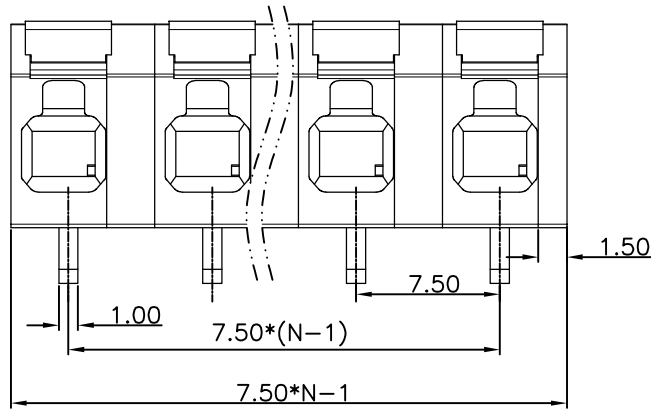

P.C.B. LAYOUT

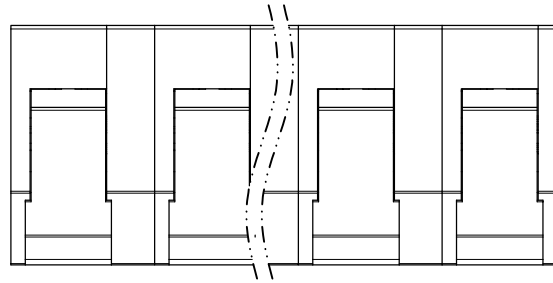

产品命名编码:
(Product Number Code):

FS2.5-XX-750-2601R-YY

系列(Series)

型号(Model)

极数(NO.of poles)

塑体颜色(Housing Color)

端子间距(Pitch)

- 1:绿色(Green) 7:透明(Transparent)
2:蓝色(Blue) 8:白色(White)
3:黑色(Black) 9:黄色(Yellow)
4:灰色(Grey) Y:多种颜色(Mixed color)
5:橙色(Orange)
6:红色(Red)

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/15A	450V/24A	450V/24A
IEC	过压类别(Overvoltage Category) /污染等级(Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	450V/24A	450V/24A	450V/24A
压线范围(Wire Range)		24~14AWG (0.2-2.5mm ²)		
工频耐压(Frequency Voltage)		AC 2500V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		8-9 (mm)		
工作温度(Temperature)		-40℃~+105℃		
额定扭矩(Rated torque)		/		
焊锡温度(Soldering temperature)		250℃/5S		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66 UL94V-0		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plsted)		

P=7.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	14.00	21.50	29.00	36.50	44.00	51.50	59.00	66.50	74.00	81.50	89.00	96.50
B	7.50	15.00	22.50	30.00	37.50	45.00	52.50	60.00	67.50	75.00	82.50	90.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	104.00	111.50	119.00	126.50	134.00	141.50	149.00	156.50	164.00	171.50	179.00	
B	97.50	105.00	112.50	120.00	127.50	135.00	142.50	150.00	157.50	165.00	172.50	

 东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD,		公差范围(Tolerance Range)	
型号(Type): FS2.5-XX-750-2601R-YY		150~	±1.50
		60~150	±1.00
核准(Approval):		图号(Drawing NO.):	30~60 ±0.60
			6~30 ±0.40
核审(Audit):		单位(Units):mm	0~6 ±0.25
		页码(Page):1/1	角度(X) ±2° (Angle) X.X ±1°
设计(Design):		比例(Scale):FULL	版次(Versions):T0