



东莞市澳斯电子有限公司
DONGGUAN AOSI ELECTRONICS CO., LTD

地址 /ADD: 广东省东莞市厚街镇陈屋莞太路中段44号厚达科技园B栋
44# ChenWu load ChenWu community Houjie Town Dongguan Guandong China

电话 /TEL: 86-0769-27229190 22259545

邮箱 /E-mail: FST@fastgd.cn

网址 /WEB: <http://www.fastgd.cn>

澳斯电子

接线端子专业制造商
Terminal block Manufacturer

AOSI INTRODUCTION

澳斯简介>>>

东莞市澳斯电子有限公司是一家集新品研发、规模化生产、品牌化销售为一体的电子元器件企业。

2015年于广东省东莞市正式成立，并迅速聚集了一批高素质有活力的管理人员和技术精英。

澳斯，一家以人为本的先进企业，一直以极大的热情进行创造，紧跟各种连接器发展的脚步，在全体100名成员的努力下，形成了今日完善的连接器技术体系。

澳斯，一家致力于提供优质服务制造世界一流产品的企业，所产产品已被广泛应用于电子、电子、安防、工业、电器、照明、通讯等行业。

澳斯，把营造更加安全的连接环境作为自己的使命，为实现这一目标，产品已通过UL、CE、CQC、TUV、RoHS、Reach等检测。

为持续改进质量，提升澳斯品牌，我们先后从德国、日本、台湾引进高端制造及加工设备，用于模具制造，注塑成型及精密冲压。各部门统一推广信息化管理，优化运作，提高了效益，使产品更加具有竞争力。

澳斯本着“诚信经营，优质服务”的经营理念，愿与海内外客户携手合作，共创未来。



诚信经营 | 优质服务

About US>>>

Dongguan AOSI Electronics Co., Ltd. is an electronic components enterprise integrating new product development, large-scale production and brand marketing.


It was formally established in DongGuan City, GuangDong Province, in 2015, and quickly gathered a group of high-quality and energetic management and technical elites.

As a people-oriented advanced enterprise, AOSI has been creating with great enthusiasm and keeping up with the pace of the development of various connectors. With the joint efforts of all 100 members, it has had a perfect connector technology system so far. As a company dedicated to providing quality services and manufacturing world-class products, all of its products have been widely applied in electronics, security, industry, electrical appliances, lighting, communications and other industries.

AOSI takes creating a safer connection environment as its mission. To achieve this goal, its products have passed UL, CE, CQC, TUV, RoHS, Reach and other tests.

In order to improve the quality and enhance the brand of AOSI continuously, we have imported high-end manufacturing and processing equipment from Germany, Japan and Taiwan for mold manufacturing, injection molding and precision stamping. Information management have been promoted in all the departments in a unified way to optimize operation and improve efficiency, thus making its products more competitive.

AOSI, based on the business philosophy of "integrity management and quality service", is willing to work with clients at home and abroad to create the future together.

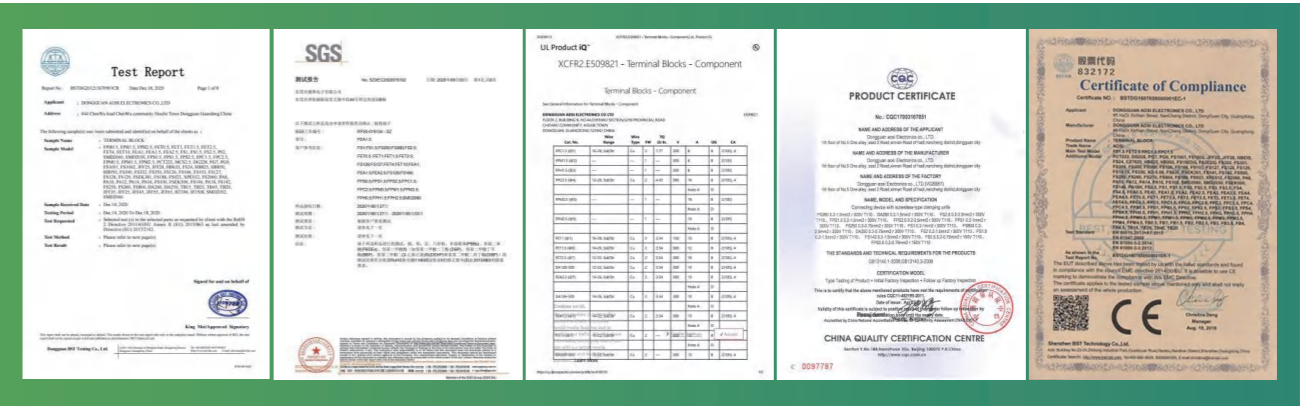

TEST EQUIPMENT
测试设备>>>




奥斯本着“客户的满意，我们的追求”的信念，致力于为客户提供更精准更高品质的产品。奥斯始终坚持以“客户为中心”，以最真诚的态度对待每一位客户，为客户提供更全面的服务，满足客户各种不同需求。



PCB弹簧式接线端子
PCB SPRING TERMINAL BLOCK

P5-P7


弹簧式PCB接线端子，接线方式分为笼式弹簧连接、蝶形弹簧连接，接线快捷方便，提高作业效率。可以连接截面为0.2mm至16mm的所有类型的导线，间距有2.5mm-15.0mm可供选择。产品设计符合IEC60998、UL1059等国际标准。已取得美国UL认证，德国VDE认证。

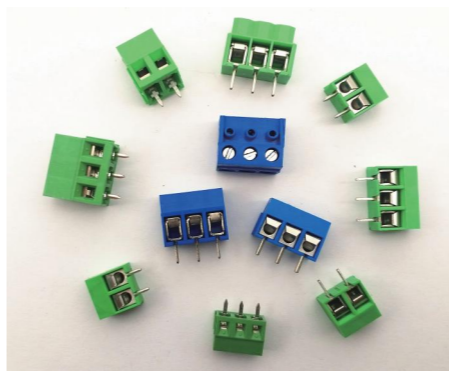

PCB螺钉式接线端子
PCB SCREW TERMINAL BLOCK

P8-P10


螺钉式PCB接线端子，结构设计兼顾了接线方便、螺钉连接牢固的特点。可以连接截面为0.2mm至35mm的所有类型的导线，间距有2.5mm-19.0mm可供选择。产品设计符合IEC60998、UL1059等国际标准。已取得美国UL认证，德国VDE认证。

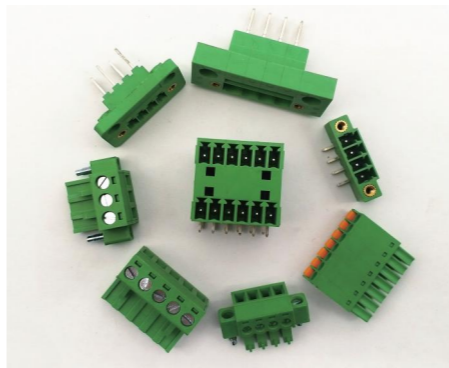

插拔式接线端子
PLUG-IN TERMINAL BLOCK

P11-P16




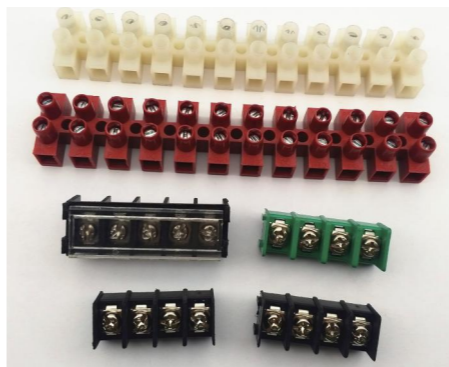




插拔式接线端子，采用通用型、易维护的导线连接，几乎可话用于所有行业和市场的设备类型。适用于线径为0.2mm至35mm的所有类型的导线，间距有2.5mm-35.0mm可供选择。采用螺钉、弹簧、快速免剥线连接。适用电流最高可达125A、电压最高可达1000V。产品设计符合IEC60998、UL1059等国际标准。已取得美国UL认证。



















其它类
OTHERS









P17









可提供栅栏式接线端子，贯通式接线端子，SMD贴片和布线连接器等。









产品型号PART NO.	FS1-XX-254-00	FS1-XX-254-01	FS1-XX-254-02	FS1-XX-254-03
产品 Product				
间距 Pitch	2.54mm	2.54mm	2.54mm	2.54mm
定额 Rated	150V 4A	150V 4A	150V 5A	150V 5A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	26-18AWG 0.2-0.5MM ²	26-18AWG 0.2-0.5MM ²	26-18AWG 0.2-0.5MM ²	26-18AWG 0.2-0.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FS1-XX-250-04	FS1.5-XX-508-00	FS1.5-XX-508-01	FS1.5-XX-762-00
产品 Product				
间距 Pitch	2.5mm	5.08mm	5.08mm	7.62mm
定额 Rated	150V 6A	300V 10A	300V 10A	300V 10A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	26-18AWG 0.2-0.5MM ²	24-14AWG 0.2-1.5MM ²	24-14AWG 0.2-1.5MM ²	24-14AWG 0.2-1.5MM ²
产品详情 二维码 Specification				

产品型号PART NO.	FS1.5-XX-762-01	FS1.5-XX-500-02	FS1.5-XX-500-03	FS1.5-XX-750-02
产品 Product				
间距 Pitch	7.62mm	5.00mm	5.00mm	5.00mm
定额 Rated	300V 10A	300V 10A	300V 10A	300V 10A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	24-14AWG 0.2-1.5MM ²	26-18AWG 0.2-1.5MM ²	26-18AWG 0.2-1.5MM ²	26-18AWG 0.2-1.5MM ²
产品详情 二维码 Specification				

产品型号PART NO.	FS1.5-XX-750-03	FS1.5-XX-350-04	FS1.5-XX-700-04	FS1.5-XX-381-06
产品 Product				
间距 Pitch	5.00mm	3.50mm	7.00mm	3.81mm
定额 Rated	300V 10A	300V 8A	300V 8A	300V 10A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	26-18AWG 0.2-1.5MM ²	22-18AWG 0.2-1MM ²	22-18AWG 0.2-1MM ²	26-18AWG 0.2-1MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FS1.5-XX-500-06	FS1.5-XX-750-06	FS1.5-XX-1000-06	FS1.5-XX-500-07
产品 Product				
间距 Pitch	5.0mm	7.62mm	10.0mm	5.00mm
定额 Rated	300V 10A	300V 10A	300V 10A	300V 10A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	22-18AWG 0.2-1.5MM ²	22-18AWG 0.2-1.5MM ²	22-18AWG 0.2-1.5MM ²	22-18AWG 0.2-1.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FS1.5-XX-500-24	FS2.5-XX-500-04	FS2.5-XX-500-05	FS2.5-XX-500-06
产品 Product				
间距 Pitch	5.0mm	5.0mm	5.0mm	5.0mm
定额 Rated	300V 10A	300V 15A	300V 15A	300V 12A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	20-16AWG 0.2-1.5MM ²	26-14AWG 0.2-2.5MM ²	26-14AWG 0.2-2.5MM ²	20-12AWG 0.5-2.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FS2.5-XX-750-06	FS2.5-XX-1000-06	FS2.5-XX-500-08	FS2.5-XX-500-28
产品 Product				
间距 Pitch	7.5mm	10.0mm	5.0mm	5.0mm
定额 Rated	300V 12A	300V 12A	300V 10A	300V 10A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	20-12AWG 0.5-2.5MM ²	20-12AWG 0.5-2.5MM ²	20-16AWG 0.2-1.5MM ²	20-16AWG 0.2-1.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.				
产品 Product				
间距 Pitch				
定额 Rated				
极数 Poles				
线径 Wire range				
产品详情 二维码 Specification				









产品型号PART NO.				
产品 Product				
间距 Pitch				
定额 Rated				
极数 Poles				
线径 Wire range				
产品详情 二维码 Specification				









产品型号PART NO.	FET0.5-XX-254-00	FET1-XX-350-00	FET1.5-XX-500-04	FET1.5-XX-500-04R
产品 Product				
间距 Pitch	2.54mm	3.50mm	5.0mm	5.0mm
定额 Rated	150V 7A	300V 10A	300V 12A	300V 12A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	26-18AWG 0.25-1MM ²	28-16AWG 0.5-1MM ²	26-14AWG 0.5-1.5MM ²	26-14AWG 0.5-1.5MM ²
产品详情 二维码 Specification				





产品型号PART NO.	FET2.5-XX-508-00	FET2.5-XX-508-01	FET2.5-XX-508-02	FET2.5-XX-508-03
产品 Product				
间距 Pitch	5.08mm	5.08mm	5.08mm	5.08mm
定额 Rated	300V 15A	300V 15A	300V 15A	300V 15A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	30-14AWG 0.5-2.5MM ²	30-14AWG 0.5-2.5MM ²	30-14AWG 0.5-2.5MM ²	30-14AWG 0.5-2.5MM ²
产品详情 二维码 Specification				

产品型号PART NO.	FET2.5-XX-508-12	FET2.5-XX-508-13	FET2.5-XX-508-14	FET2.5-XX-508-15
产品 Product				
间距 Pitch	5.08mm	5.08mm	5.08mm	5.08mm
定额 Rated	300V 15A	300V 15A	300V 15A	300V 15A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	30-14AWG 0.5-2.5MM ²	30-14AWG 0.5-2.5MM ²	30-14AWG 0.5-2.5MM ²	30-14AWG 0.5-2.5MM ²
产品详情 二维码 Specification				

产品型号PART NO.	FET2. 5-XX-500-04	FET2. 5-XX-500-04R	FET2. 5-XX-750-04	FET2. 5-XX-750-04R
产品 Product				
间距 Pitch	5.0mm	5.0mm	7.5mm	7.5mm
定额 Rated	300V 16A	300V 16A	300V 16A	300V 16A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	22-12AWG 0.5-2.5MM ²	22-12AWG 0.5-2.5MM ²	22-12AWG 0.5-2.5MM ²	22-12AWG 0.5-2.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FET2. 5-XX-500/508-05	FET2. 5-XX-500/508-05R	FET1. 5-XX-500-07	FET2. 5-XX-500-08
产品 Product				
间距 Pitch	5.0/5.08mm	5.0/5.08mm	5.0mm	5.0mm
定额 Rated	300V 20A	300V 20A	300V 12A	300V 16A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	26-12AWG 0.5-2.5MM ²	26-12AWG 0.5-2.5MM ²	22-12AWG 0.5-2.5MM ²	28-16AWG 0.5-1MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FEA1-XX-350/396-00	FEA1-XX-350/396-00R	FEA1. 5-XX-500-06	FEA1. 5-XX-500-06R
产品 Product				
间距 Pitch	3.5/3.96mm	3.5/3.96mm	5.0mm	5.0mm
定额 Rated	300V 12A	300V 12A	300V16A	300V16A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	26-14AWG 0.5-1.5MM ²	26-14AWG 0.5-1.5MM ²	22-14AWG 0.5-1.5MM ²	22-14AWG 0.5-1.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FEA2. 5-XX-500-06	FEA2. 5-XX-500-08		
产品 Product				
间距 Pitch	5.0mm	5.0mm		
定额 Rated	300V 10A	300V 16A		
极数 Poles	2P-24P	2P-24P		
线径 Wire range	26-14AWG 0.5-2.5MM ²	26-14AWG 0.5-2.5MM ²		
产品详情 二维码 Specification				









产品型号PART NO.				
产品 Product				
间距 Pitch				
定额 Rated				
极数 Poles				
线径 Wire range				
产品详情 二维码 Specification				









产品型号PART NO.				
产品 Product				
间距 Pitch				
定额 Rated				
极数 Poles				
线径 Wire range				
产品详情 二维码 Specification				









产品型号PART NO.	FPS0. 5-XX-250-00	FPS1. 5-XX-350/381-00	FPS1. 5-XX-350/381-01	FPS1. 5-XX-350/381-02
产品 Product				
间距 Pitch	2.5mm	3.5/3.81mm	3.5/3.81mm	3.5/3.81mm
定额 Rated	150V 5A	300V 8A	300V8A	300V8A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	26-20AWG 0.2-0.5MM ²	28-16AWG 0.5-1.5MM ²	28-16AWG 0.5-1.5MM ²	28-16AWG 0.5-1.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FPS1. 5-XX-350/381-03	FPS1. 5-XX-350/381-04	FPS1. 5-XX-350-25	FPS1. 5-XX-350-27
产品 Product				
间距 Pitch	3.5/3.81mm	3.5/3.81mm	3.5mm	3.5mm
定额 Rated	300V8A	300V8A	300V8A	300V8A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	28-16AWG 0.5-1.5MM ²	28-16AWG 0.5-1.5MM ²	28-16AWG 0.5-1.5MM ²	28-16AWG 0.5-1.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FPS1. 5-XX-350-28	FPS1. 5-XX-350-29	FS2. 5-XX-500/508-00	FS2. 5-XX-500/508-01
产品 Product				
间距 Pitch	3.5mm	3.5mm	5.0/5.08mm	5.0/5.08mm
定额 Rated	300V8A	300V8A	300V10A	300V10A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	28-16AWG 0.5-1.5MM ²	28-16AWG 0.5-1.5MM ²	28-12AWG 0.5-2.5MM ²	28-12AWG 0.5-2.5MM ²
产品详情 二维码 Specification				





产品型号PART NO.	FPC1. 5-XX-350/381-00	FPC1. 5-XX-350/381-01	FPC1. 5-XX-350/381-03	FPC1. 5-XX-350/381-04
产品 Product				
间距 Pitch	3.5/3.81mm	3.5/3.81mm	3.5/3.81mm	3.5/3.81mm
定额 Rated	300V 8A	300V 8A	300V8A	300V8A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	28-16AWG 0.5-1.5MM ²	28-16AWG 0.5-1.5MM ²	28-16AWG 0.5-1.5MM ²	28-16AWG 0.5-1.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FPC1. 5-XX-350/381-05	FPC1. 5-XX-350/381-06	FPC1. 5-XX-381-17	FPC2. 5-XX-500/508-00
产品 Product				
间距 Pitch	3.5/3.81mm	3.5/3.81mm	3.81mm	5.0/5.08mm
定额 Rated	300V8A	300V8A	300V 8A	300V 16A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	28-16AWG 0.5-1.5MM ²	28-16AWG 0.5-1.5MM ²	28-16AWG 0.5-1.5MM ²	28-12AWG 0.5-2.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FPC2. 5-XX-500/508-01	FPC2. 5-XX-500/508-07	FPC2. 5-XX-500/508-08	FPC2. 5-XX-500/508-03
产品 Product				
间距 Pitch	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm
定额 Rated	300V 16A	300V 16A	300V 16A	300V 16A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	28-12AWG 0.5-2.5MM ²	28-12AWG 0.5-2.5MM ²	28-12AWG 0.5-2.5MM ²	28-12AWG 0.5-2.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FPC2. 5-XX-500/508-04	FPC2. 5-XX-500/508-05	FPC2. 5-XX-500/508-06	FPC2. 5-XX-508-17
产品 Product				
间距 Pitch	5.0/5.08mm	5.0/5.08mm	5.0/5.08mm	5.08mm
定额 Rated	300V 16A	300V 16A	300V 16A	300V 16A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	28-12AWG 0.5-2.5MM ²	28-12AWG 0.5-2.5MM ²	28-12AWG 0.5-2.5MM ²	28-12AWG 0.5-2.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FPC2. 5-XX-508-18	FPC2. 5-XX-508-19	FPC2. 5-XX-508-11	FPC2. 5-XX-508-12
产品 Product				
间距 Pitch	5.08mm	5.08mm	5.08mm	5.08mm
定额 Rated	300V 16A	300V 16A	300V 16A	300V 16A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	28-12AWG 0.5-2.5MM ²	28-12AWG 0.5-2.5MM ²	28-12AWG 0.5-2.5MM ²	28-12AWG 0.5-2.5MM ²
产品详情 二维码 Specification				









产品型号PART NO.	FPC2. 5-XX-762-00	FPC2. 5-XX-762-01		
产品 Product				
间距 Pitch	7.62mm	7.62mm		
定额 Rated	300V 16A	300V 16A		
极数 Poles	2P-24P	2P-24P		
线径 Wire range	28-12AWG 0.5-2.5MM ²	28-12AWG 0.5-2.5MM ²		
产品详情 二维码 Specification				









产品型号PART NO.	FPM0. 5-XX-250-00	FPM0. 5-XX-250-01	FPM1. 5-XX-350/381-00	FPM1. 5-XX-350/381-01
产品 Product				
间距 Pitch	2.5mm	2.5mm	3.5/3.81MM	3.5/3.81MM
定额 Rated	150V 5A	150V 5A	300V/8A	300V/8A
极数 Poles	2-24P	2-24P	2P-24P	2P-24P
线径 Wire range	---	---	---	---
产品详情 二维码 Specification				









产品型号PART NO.	FPM2. 5-XX-500/508-00	FPM2. 5-XX-500/508-01	FPM2. 5-XX-500/508-02	FPM2. 5-XX-500/508-03
产品 Product				
间距 Pitch	5.0/5.08MM	5.0/5.08MM	5.0/5.08MM	5.0/5.08MM
定额 Rated	300V/16A	300V/16A	300V/16A	300V/16A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	---	---	---	---
产品详情 二维码 Specification				









产品型号PART NO.	FPM1. 5-XX-381-06	FPM2. 5-XX-508-06	FPM2. 5-XX-508-07	FPM2. 5-XX-508-08
产品 Product				
间距 Pitch	3.81MM	5.08MM	5.08MM	5.08MM
定额 Rated	300V/8A	300V/16A	300V/15A	300V/15A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	---	---	---	---
产品详情 二维码 Specification				





产品型号PART NO.	FPM2. 5-XX-508-09	FPM2. 5-XX-508-10	FPM2. 5-XX-7.62-00	FPM2. 5-XX-7.62-01
产品 Product				
间距 Pitch	5.08MM	5.08MM	7.62MM	7.62MM
定额 Rated	300V/15A	300V/15A	300V/16A	300V/16A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	---	---	---	---
产品详情 二维码 Specification				

产品型号PART NO.	FPM2. 5-XX-7.62-02	FPM2. 5-XX-7.62-03	FPM2. 5-XX-7.62-04	FPM2. 5-XX-7.62-05
产品 Product				
间距 Pitch	7.62MM	7.62MM	7.62MM	7.62MM
定额 Rated	300V/16A	300V/16A	300V/16A	300V/16A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	---	---	---	---
产品详情 二维码 Specification				

产品型号PART NO.	FPM1. 5-XX-381-12	FPM1. 5-XX-381-13	FPM1. 5-XX-381-14	FPM1. 5-XX-381-15
产品 Product				
间距 Pitch	3.81MM	3.81MM	3.81MM	3.81MM
定额 Rated	300V/8A	300V/8A	300V/8A	300V/8A
极数 Poles	2P-24P	2P-24P	2P-24P	2P-24P
线径 Wire range	---	---	---	---
产品详情 二维码 Specification				

产品型号PART NO.	FPH0. 5-XX-250-00	FPH0. 5-XX-250-01	FPH1. 5-XX-350/381-00	FPH1. 5-XX-350/381-01
产品 Product				
间距 Pitch	2.5mm	2.5mm	3.5/3.81MM	3.5/3.81MM
定额 Rated	150V 5A	150V 5A	300V 8A	300V 8A
极数 Poles	2-24P	2-24P	2-24P	2-24P
线径 Wire range	---	---	---	---
产品详情 二维码 Specification				

产品型号PART NO.	FPH1. 5-XX-350/381-04	FPH1. 5-XX-350/381-05	FPH1. 5-XX-350/381-02	FPH1. 5-XX-350/381-03
产品 Product				
间距 Pitch	3.5/3.81MM	3.5/3.81MM	3.5MM	3.5MM
定额 Rated	300V 8A	300V 8A	300V 8A	300V 8A
极数 Poles	2-24P	2-24P	2-24P	2-24P
线径 Wire range	---	---	---	---
产品详情 二维码 Specification				

产品型号PART NO.	FPH1. 5-XX-350/381-02F	FPH1. 5-XX-350/381-03F		
产品 Product				
间距 Pitch	3.5MM	3.5MM		
定额 Rated	300V 8A	300V 8A		
极数 Poles	2-24P	2-24P		
线径 Wire range	---	---		
产品详情 二维码 Specification				


产品型号PART NO.	PA8-PA18H	PA8HDS-PA16HDS	HB635-HB950	HB635M-HB950M
产品 Product				
间距 Pitch	8-16.5MM	8-16.5MM	6.35-9.5MM	6.35-9.5MM
定额 Rated	450-500V/17.5-101A	450-500V/17.5-101A	300V/10-20A	300V/10-20A
极数 Poles	1-12P	1-12P	2-24P	2-24P
线径 Wire range	---	---	28-12AWG 0.5-4MM ²	28-12AWG 0.5-4MM ²
产品详情 二维码 Specification				

产品型号PART NO.	JFF25C-JFF65C	JFF25S-JFF65S	JFF25R-JFF65R	JFF25H-JFF65H
产品 Product				
间距 Pitch	7.62-11mm	7.62-11mm	7.62-11mm	7.62-11mm
定额 Rated	300V/15-20A	300V/15-20A	300V/15-20A	300V/15-20A
极数 Poles	2-24P	2-24P	2-24P	2-24P
线径 Wire range	22-12AWG	22-12AWG	22-12AWG	22-12AWG
产品详情 二维码 Specification				


产品型号PART NO.	JFF28C-JFF78C	JFF28S-JFF78S	JFF28H-JFF78H	JFF28R-JFF78R
产品 Product				
间距 Pitch	7.62-11mm	7.62-11mm	7.62-11mm	7.62-11mm
定额 Rated	300V/15-20A	300V/15-20A	300V/15-20A	300V/15-20A
极数 Poles	2-24P	2-24P	2-24P	2-24P
线径 Wire range	22-12AWG	22-12AWG	22-12AWG	22-12AWG
产品详情 二维码 Specification				

接线方式 WIRING MODE>>>


锁螺丝对插式插头
Screw type plugs
for pluggable terminal blocks




Headers
for pluggable terminal blocks
对插式插座




免锁螺丝对插式插头
Screwless type plugs
for pluggable terminal blocks



锁螺丝式PCB板端子
PCB Screw System
terminal blocks



PCB Spring-cage
terminal blocks
免锁螺丝式PCB板端子



线规线径标准 (IEC60228/UL1059) >>>

线号 AWG Nr.	美规导线规格 (AWG)						欧规导线规格 (MM ²)					
	Solid wires 单股导线			Stranded wires 多股导线			Rated- Cross- Section 最大直径 Ømm	Single- Strand- Max 单股导线 最大直径 Ømm	Multi-Strand [™] Max. Min 多股导线		Fine a. Microtine Max. Min 多股导线	
	最大直径Ø mm	导线截面积 Circ.mil mm ²	导线截面积 mm ²	最大直径Ø mm	导线截面积 Circ.mil mm ²	最大直径 Ømm			线芯根数	最大直径 Ømm	线芯根数	
24	0.51	404	0.21	-	-	-	0.2	0.5	-	-	-	-
20	0.81	1022	0.52	0.97	1111	0.56	0.5	0.9	1.1	7	1.1	16
18	1.02	1620	0.82	1.16	1600	0.82	0.75	1.0	1.2	7	1.3	24
(17)	1.15	2050	1.04	-	-	-	1	1.2	1.4	7	-	32
16	1.29	2580	1.31	1.50	2580	1.32	-	-	-	-	1.5	-
(15)	1.45	3260	1.65	-	-	-	1.5	1.5	1.7	7	1.8	30
14	1.63	4110	2.08	1.85	4110	2.09	-	-	-	-	-	-
(13)	1.83	5180	2.63	-	-	-	2.5	1.9	2.2	7	2.3	50
12	2.05	6530	3.31	2.41	6500	3.32	-	-	-	-	-	-
(11)	2.30	8230	4.17	-	-	-	4	2.4	2.7	7	2.9	56
10	2.59	10400	5.26	2.59	10530	5.37	-	-	-	-	-	-
(9)	2.91	13100	6.36	-	-	-	6	2.9	3.3	7	3.9	84
8	3.26	16500	8.37	3.73	16625	8.48	-	-	-	-	-	-
(7)	3.67	20800	10.56	4.15	20820	10.55	10	3.7	4.2	7	5.1	80
6	4.12	26300	13.30	4.67	26250	13.39	-	-	-	-	-	-
(5)	4.62	33100	16.77	2.95	33100	16.77	16	4.6	5.3	7	6.3	126
4	5.19	41700	21.15	5.90	41650	21.24	-	-	-	-	-	-
3	5.83	52600	26.67	6.61	52630	26.67	25	-	6.6	7	7.8	196
2	6.54	66400	33.59	7.42	66150	33.74	35	-	7.9	7	9.2	276
1	7.35	83700	42.43	8.33	83706	42.69	-	-	-	-	-	-
1/10	8.25	106000	53.46	9.35	104640	53.36	50	-	9.1	19	11.0	396