
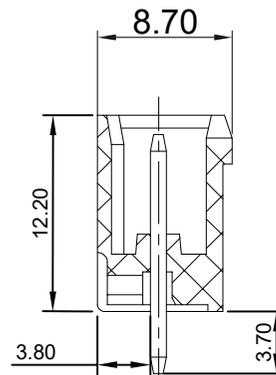
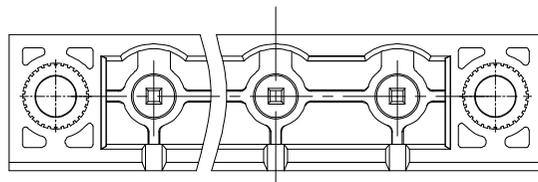
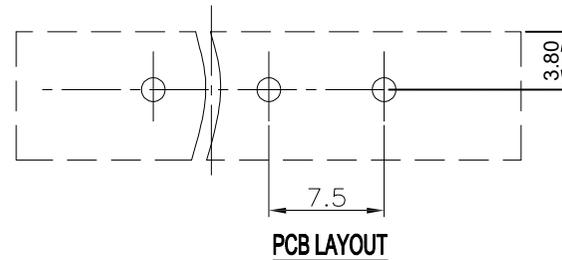


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

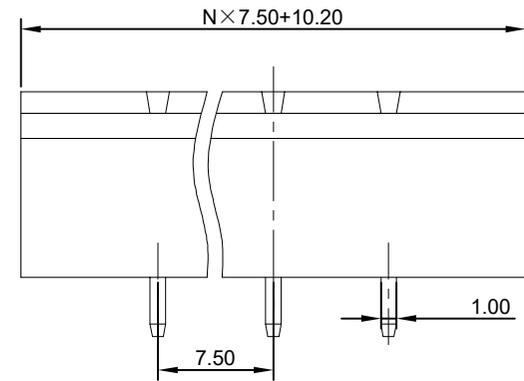

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
IEC	额定电参数 (Rated Electrical Parameters)	300V/16A	300V/10A	300V/10A
	过压类别(Overvoltage Category) / 污染等级(Pollution Degree)	III/3	III/2	II/2
IEC	额定电参数 (Rated Electrical Parameters)	630V/16A	400V/15A	400V/15A
	压线范围(Wire Range)	/		
工频耐压(Frequency Voltage)		AC 2500V		
		/		
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		/		
工作温度(Temperature)		-40° C ~ +105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66 UL94V-0		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plsted)		
/		/		

产品命名编码:
(Product Number Code):

FPM2.5-XX-750-04-YY

系列(Series) ———— 型号(Model)
极数(NO. of poles) ———— 塑体颜色(Housing Color)
端子间距(Pitch) ————

- | | |
|---------------|--------------------------|
| 1: 绿色(Green) | 7: 透明色
(Transparent) |
| 2: 蓝色(Blue) | 8: 白色(White) |
| 3: 黑色(Black) | 9: 黄色(Yellow) |
| 4: 灰色(Grey) | Y: 多种颜色
(Mixed color) |
| 5: 橙色(Orange) | |
| 6: 红色(Red) | |

P=7.50mm, N为孔位数(N for hole digits), 有效位数为(Significant Digits): 02p-24p												
N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	25.20	32.70	40.20	47.70	55.20	62.70	70.20	77.70	85.20	92.70	100.20	107.70
B	7.50	15.00	22.50	30.00	37.50	45.00	52.50	60.00	67.50	75.00	82.50	90.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	115.20	122.70	130.20	137.70	145.20	152.70	160.20	167.70	175.20	182.70	190.20	
B	97.50	105.00	112.50	120.00	127.50	135.00	142.50	150.00	157.50	165.00	172.50	

 东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.	公差范围(Tolerance Range)	
	150~	±1.50
型号(Type): FPM2.5-XX-750-04-YY	60~150	±1.00
	30~60	±0.60
核准(Approval):	6~30	±0.40
	0~6	±0.25
核审(Audit):	图号(Drawing NO.):	角度 X ±2° (Angle) X.X ±1°
	单位(Units): mm	页码(Page): 1/1
设计(Design)	比例(Scale): FULL	版次(Version): T0