

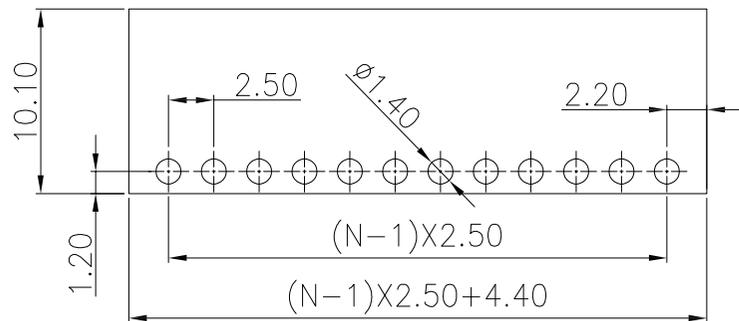
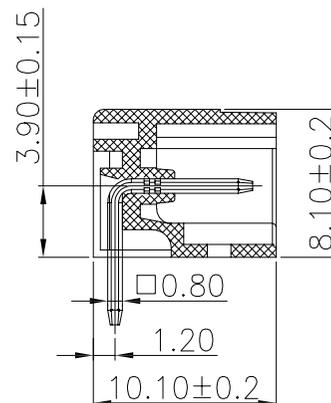


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

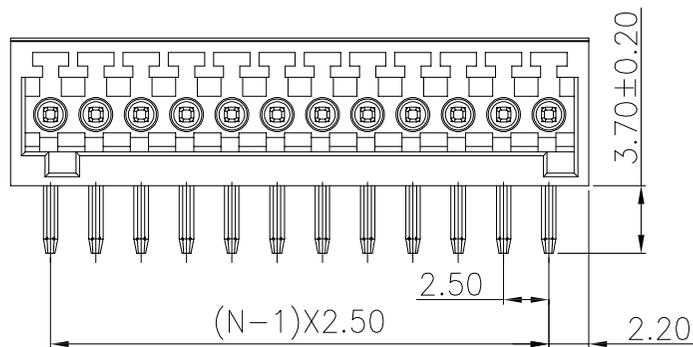

PCB LAYOUT

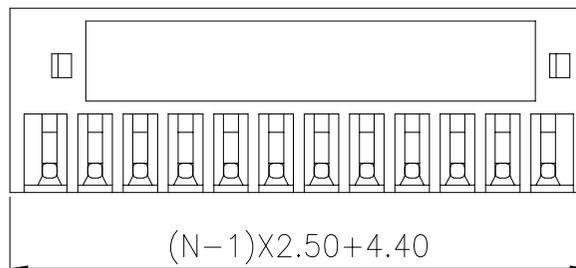

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	/	/	/
IEC	过压类别 (Overvoltage Category) / 污染等级 (Pollution Degree)	III/3	III/2	II/2
	额定电器参数 (Rated Electrical Parameters)	/	80V/4A	/
压线范围(Wire Range)		/		
工频耐压(Frequency Voltage)		AC 1600V		
冲击耐压(Rated Surge Voltage)		2500V		
绝缘阻抗 (Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		/		
工作温度(Temperature)		-40° C~+105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66 UL94V-0		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plated)		
/		/		

产品命名编码:
(Product Number Code):

FPM1-XX-250-00R-YY

极数 (NO. of poles)

型号 (Model)

塑体颜色 (Housing Color)

端子间距 (Pitch)

- | | |
|----------------|-----------------------|
| 1: 绿色 (Green) | 7: 透明色 (Transparent) |
| 2: 蓝色 (Blue) | 8: 白色 (White) |
| 3: 黑色 (Black) | 9: 黄色 (Yellow) |
| 4: 灰色 (Grey) | Y: 多种颜色 (Mixed color) |
| 5: 橙色 (Orange) | |
| 6: 红色 (Red) | |

P=2.50mm, N为孔位数(N for hole digits), 有效位数为 (Significant Digits): 02p-24p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P	11P	12P	13P
L	6.90	9.40	11.90	14.40	16.90	19.40	21.90	24.40	26.90	29.40	31.90	34.40
B	2.50	5.00	7.50	10.00	12.50	15.00	17.50	20.00	22.50	25.00	27.50	30.00
N	14P	15P	16P	17P	18P	19P	20P	21P	22P	23P	24P	
L	36.90	39.40	41.90	44.40	46.90	49.40	51.90	54.40	56.90	59.40	61.90	
B	32.50	35.00	37.50	40.00	42.50	45.00	45.50	50.00	52.50	55.00	57.50	

东莞市奥斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.	公差范围 (Tolerance Range)	
	150~	±1.50
型号 (Type): FPM1-XX-250-00R-YY	60~150	±1.00
	30~60	±0.60
核审 (Approval):	图号 (Drawing NO.):	6~30 ±0.40
		0~6 ±0.25
核审 (Audit):	单位 (Units): mm	角度 (Angle) X ±2°
	页码 (Page): 1/1	X.X ±1°
设计 (Design)	比例 (Scale): FULL	版次 (Version): T0